



# “FUZAMAN”

## High – Reliability Electronic Time Device

**National Defense Industrial Association  
49th Annual Fuze Conference  
Seattle, Washington  
April 5-7, 2005**

**Danny Schirding**  
Chief Systems Engineer  
Tank Ammunition Directorate - IMI Ammunition Group

Israel Military Industries Ltd. (IMI)  
P.O. Box 1044  
Ramat Hasharon 47100, ISRAEL  
[dschirding@imi-israel.com](mailto:dschirding@imi-israel.com)



# The Main Operational Needs of Armor Corps

- ❖ To destroy Tanks and LAV's
- ❖ To breach and penetrate bunkers and buildings with maximum resulting damage
- ❖ To incapacitate infantry, especially AT squads.






KE



Heavy - armor

HEAT



Medium and light armored vehicles and bunkers

HEP/HESH



Light armored vehicles and bunkers

WP



Screening and Spotting

STUN



Less-than - lethal  
Low Intensity Conflicts

AP



Anti Personnel,  
AT squads



The current 105-mm family rounds

IMI solutions



# ***APAM***

***Anti-Personnel/***




***Anti-Materiel***

***105-mm Tank Round***





# APAM – Anti-Personnel/Anti-Materiel

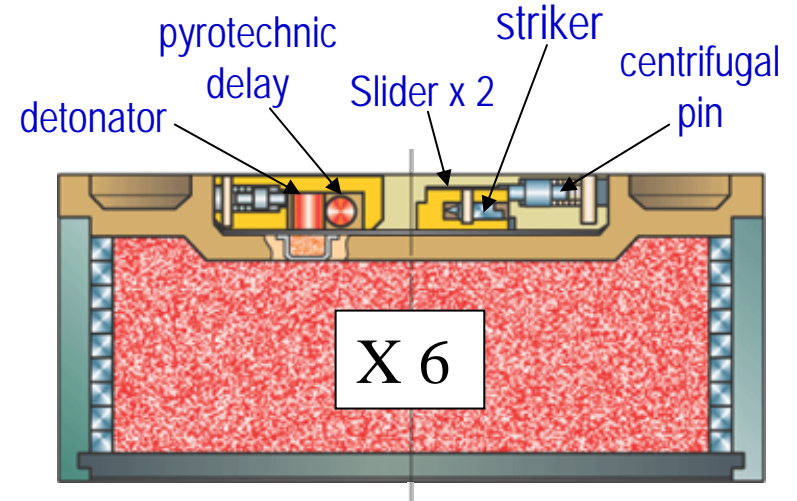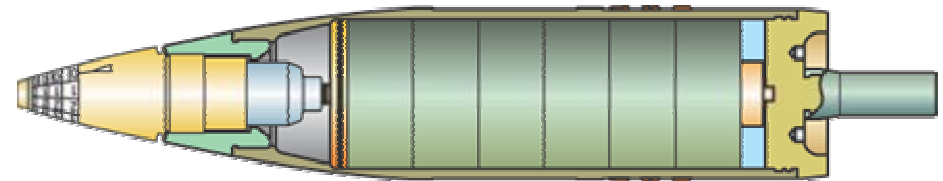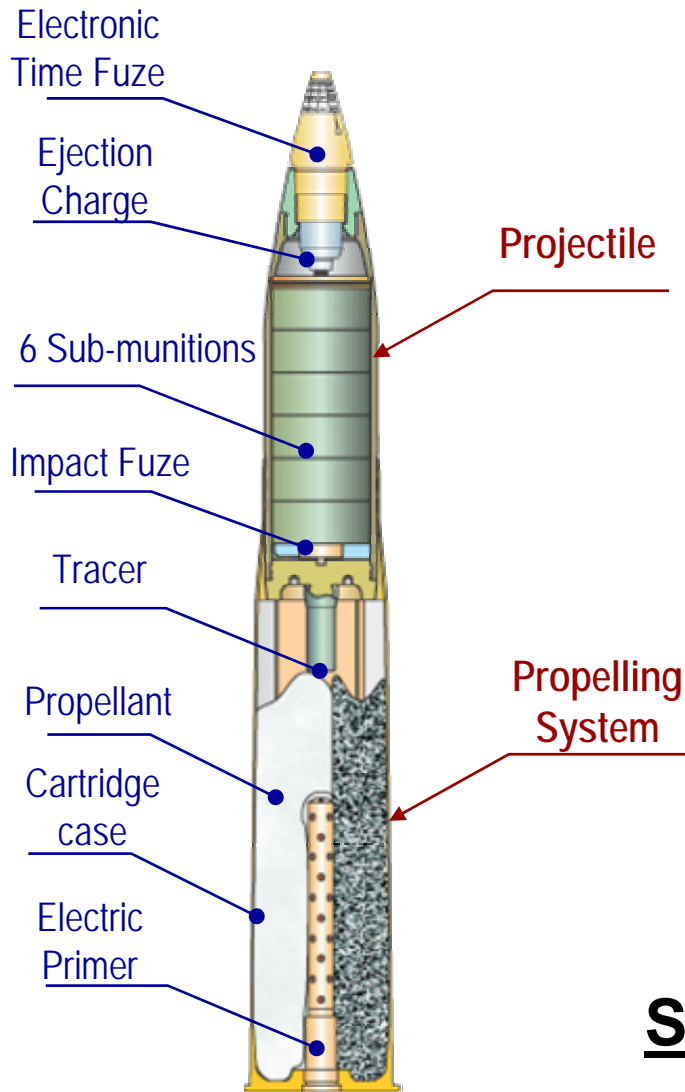

**Status: 105 mm in operational use.**

# Fuze Setting


## Manual fuze setting



## Semi-automatic fuze setter Inductive Fuze Setter (IFS)



# APAM – Basic Modes of Operation

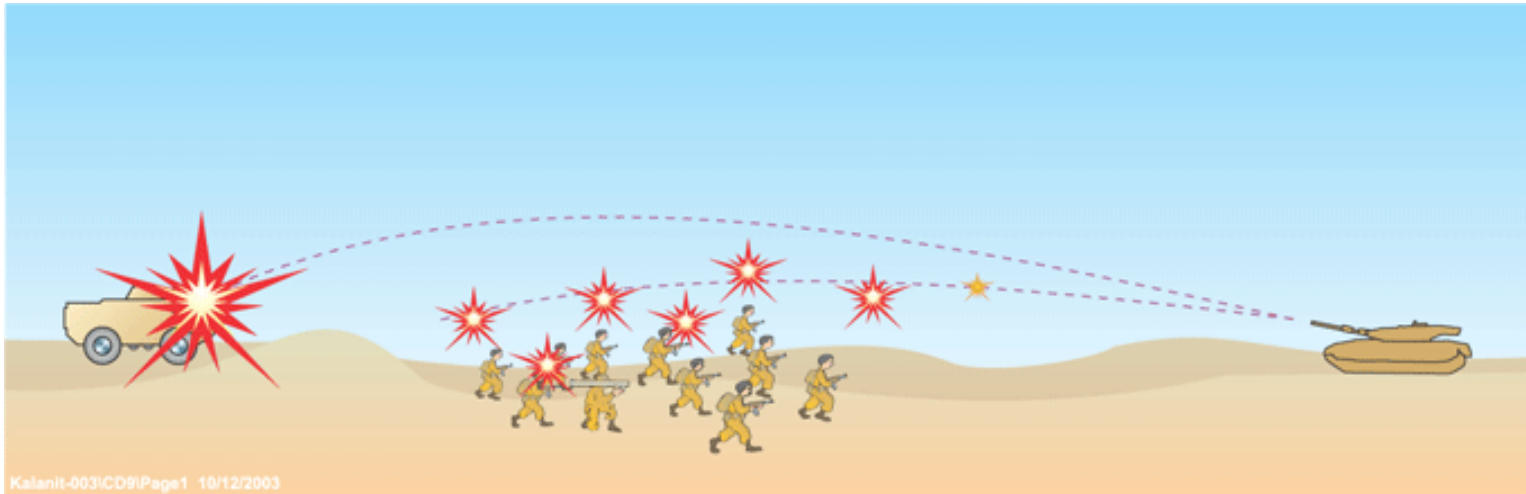

❖ **Ejection Mode** - Ejected sub-munitions explode sequentially in the air after separation.

➤ **Anti-Personnel**

➤ **Anti-Helicopter**

❖ **Impact Mode** – Entire projectile explodes as a unitary warhead upon impact.


➤ **LAV's**

➤ **Bunkers & Buildings**



# AP MODE (EJECTION) DYNAMIC ARENA TEST


*direction of fire*

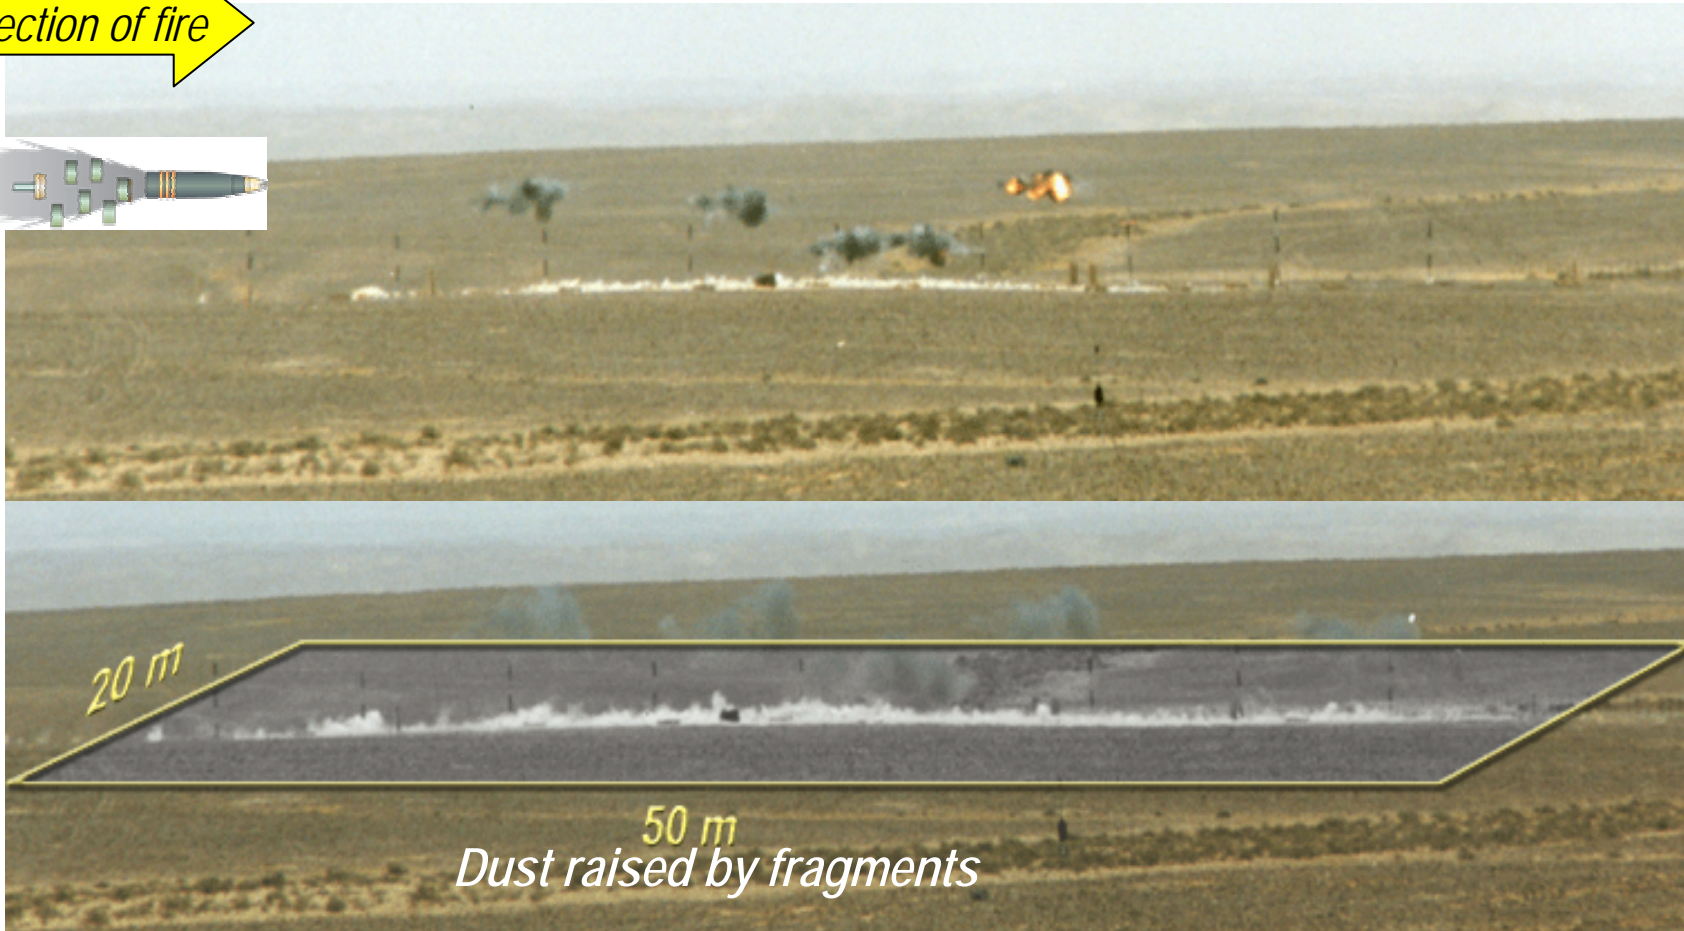

❖ **High effectiveness against hidden and prone targets**



# ANTI-HELICOPTER MODE

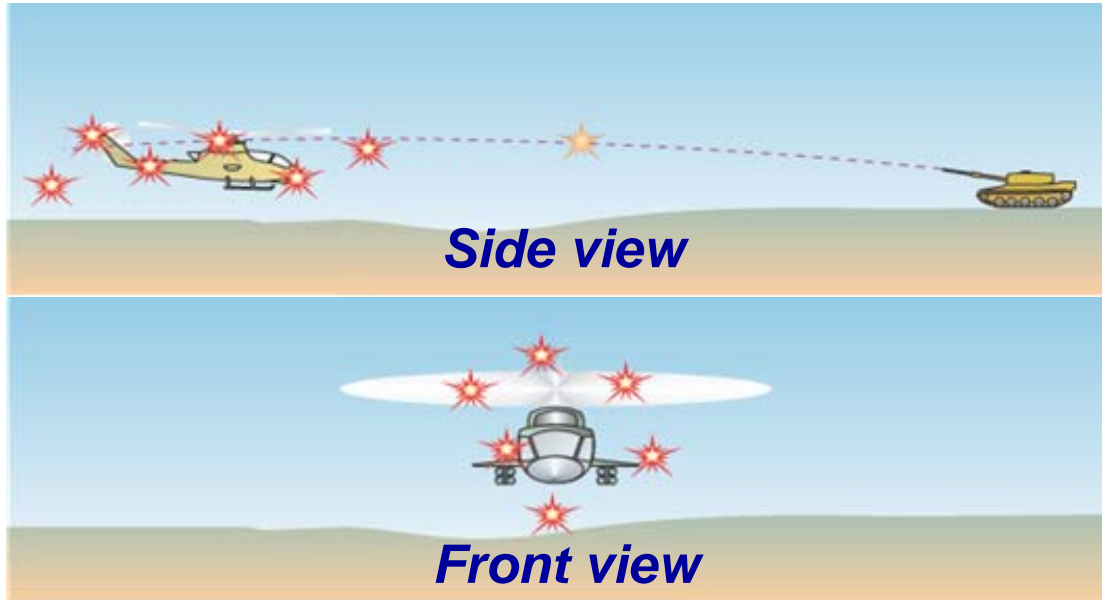


PENETRATION OF 10 mm  
RHA TARGET  
BY SUBMUNITIONS


- ❖ **Six submunitions (and the projectile body & base) fly towards the target. One hit is good enough.**
- ❖ **Even in a near miss, the helicopter pilot will see and/or feel the detonations, causing mission abort.**



# AM MODE (IMPACT)

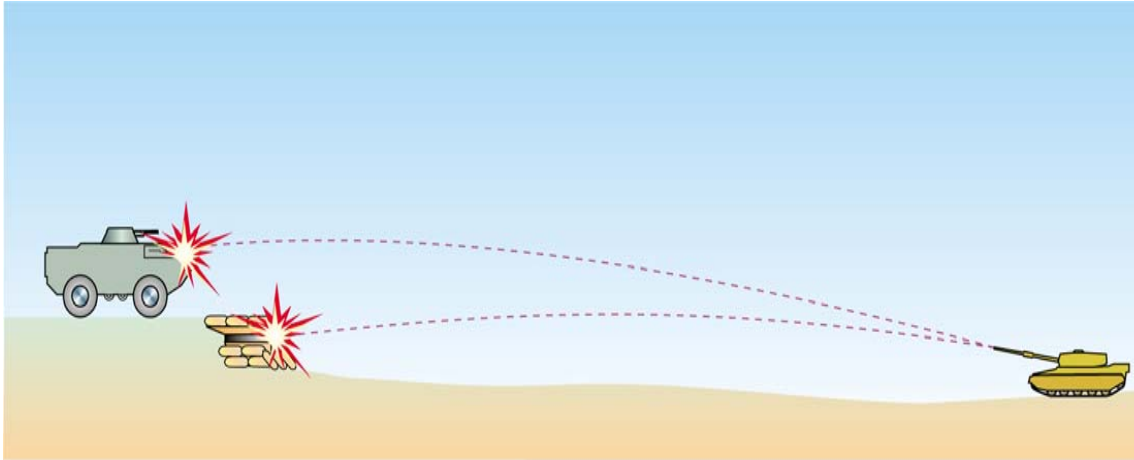

**Light armor**



**Double reinforced concrete wall**



**Hits on witness plate**

- ❖ **Projectile will penetrate LAV's and Bunkers.**
- ❖ **High density of lethal fragments inside.**



# APAM 105 - Damage to Sand & Timber Bunker



1 ROUND




## The Optimal Solution !

**Infantry,**

**LAVs,**

**Bunkers & Buildings,**

**Helicopters.**



**Armor**

- ❖ **Maximum capability with minimum rounds.**
- ❖ **Reduced logistic load.**



## The alternative... !

**Armies around the world have large stocks of 105-mm HEAT rounds (M456 / IMI M152/3)**


❖ IMI's alternative solution -

### **Upgrading HEAT rounds**

- Using the old and well known type of ammunition
- Enhance capabilities
- Improve reliability
- Improve safety
- Cost – effective (high kill probability)
- Providing Armor Corps needs




M456 /  
IMI M152/3

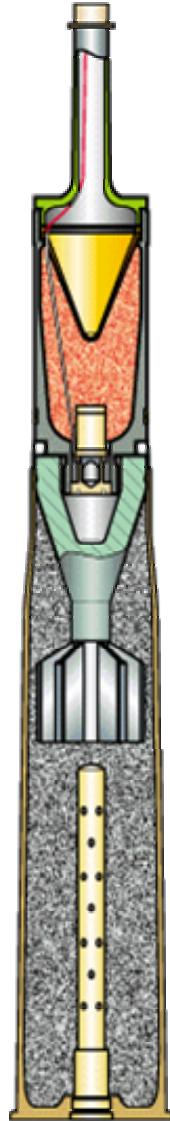


Electronic  
Device  
"FUZAMAN"

IMI M152/6

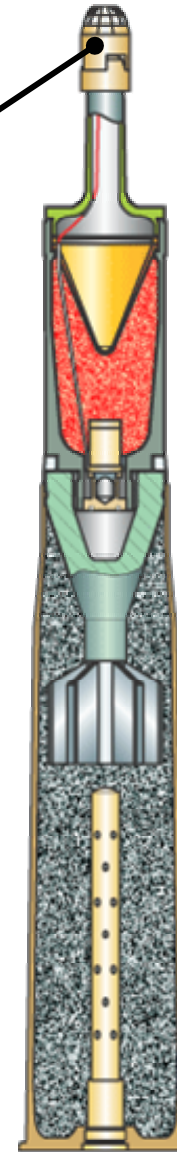





# **“FUZAMAN”** **High – Reliability Electronic Time Device**

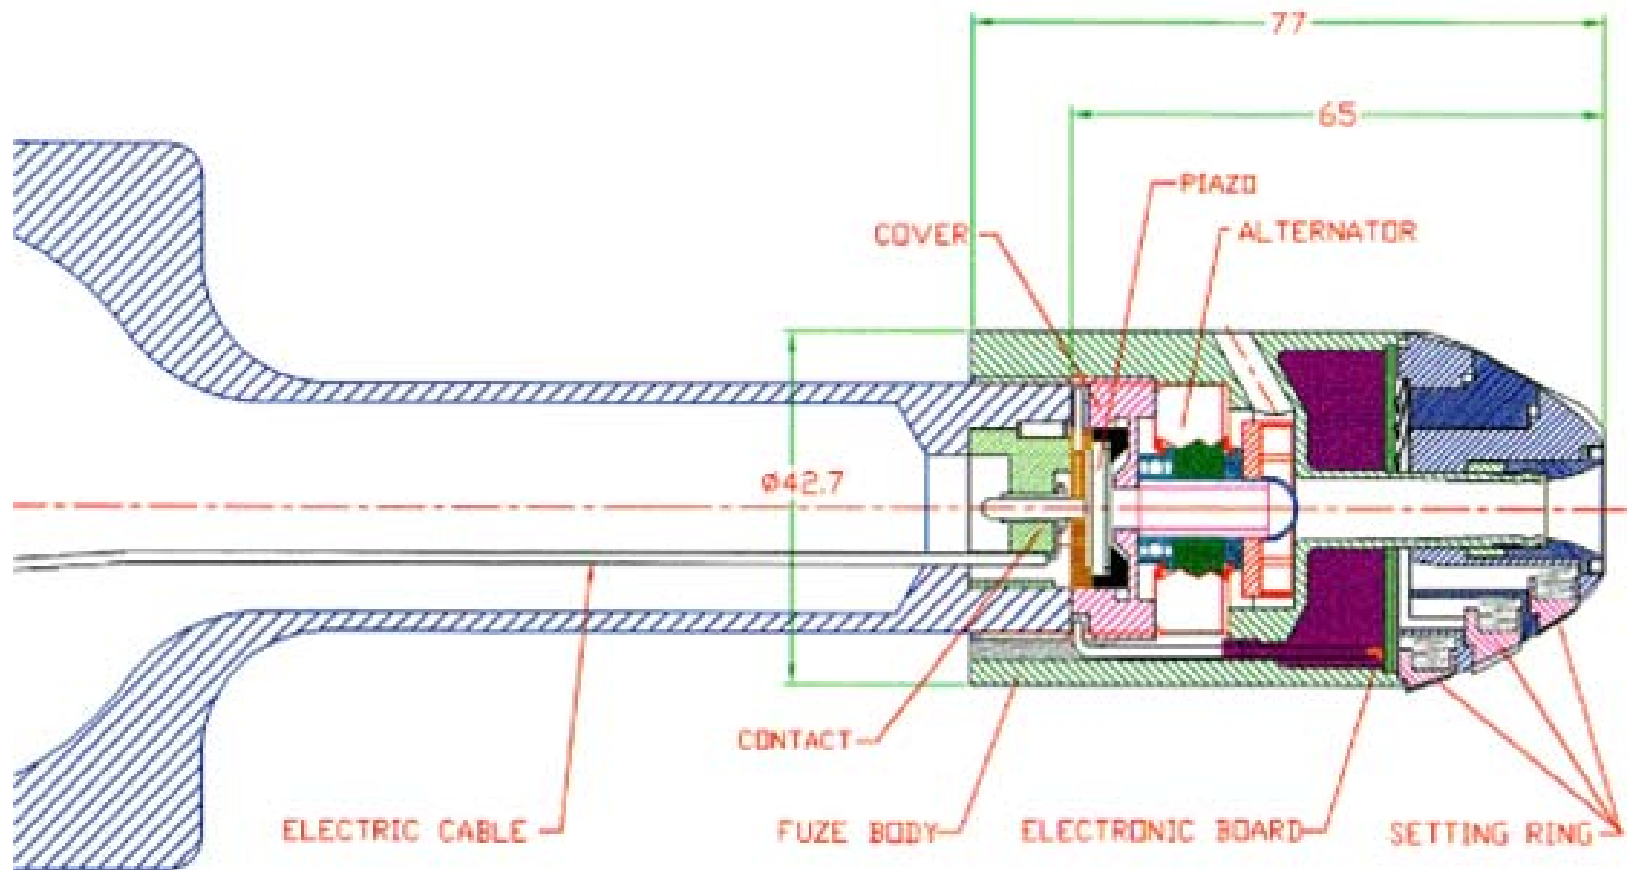

**RESHEF TECHNOLOGIES, LTD.**  
**AN ARYT COMPANY**

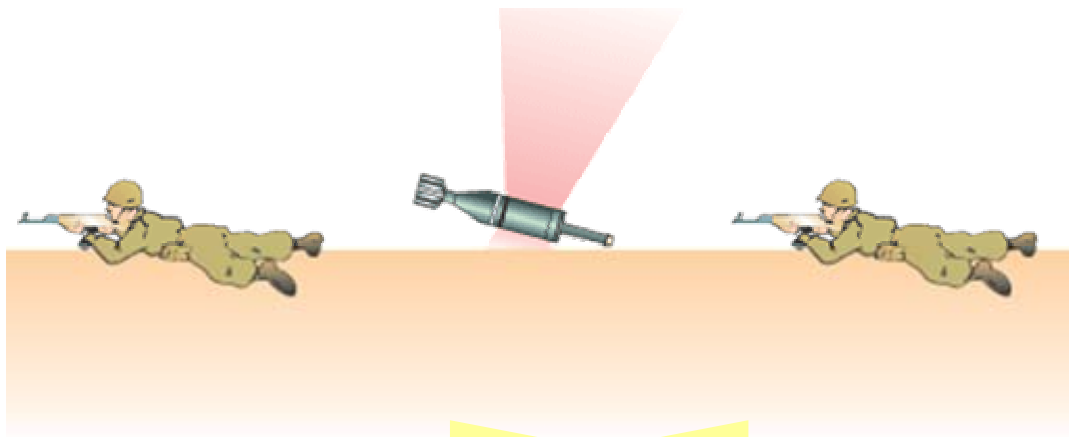

Conversion  
Benefit

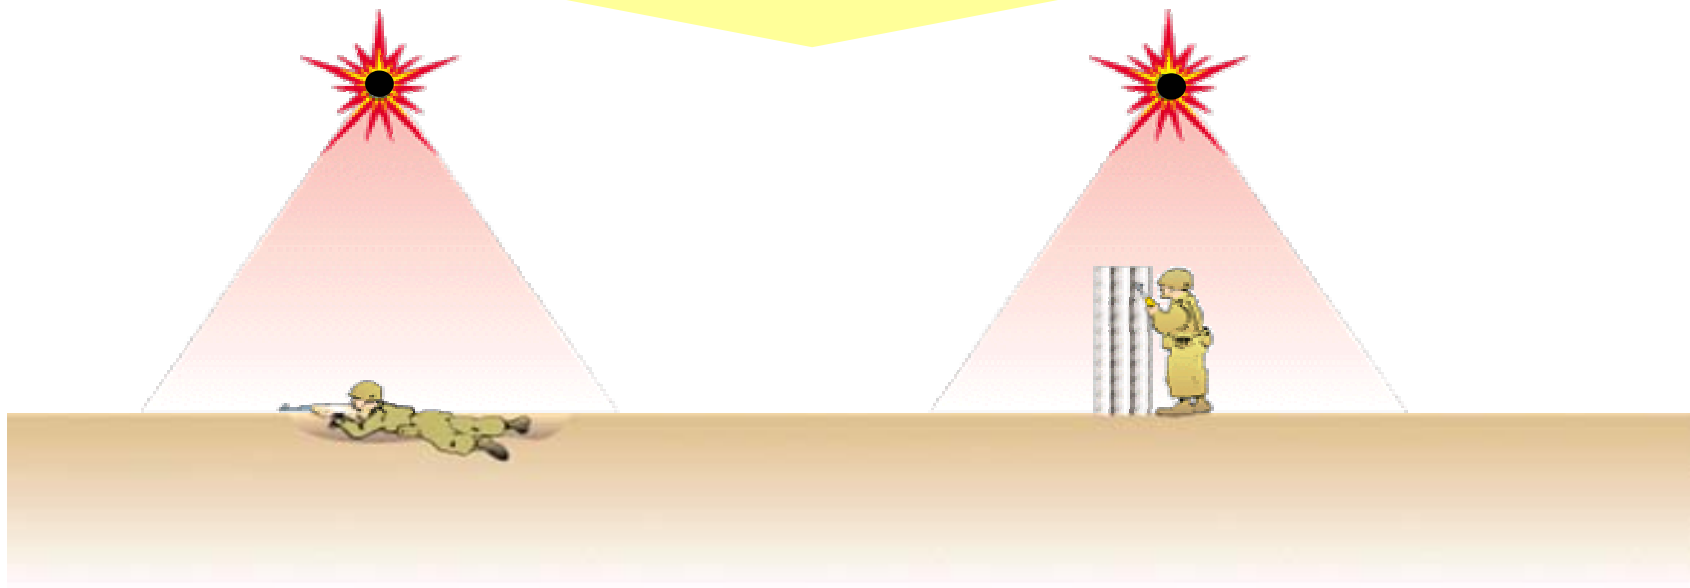



## ❖ Influence on the aeroballistics performance:

- Drag Force
- Lift Force
- Static and Dynamic Stability
- Jump




**Trajectory**  
**Dispersion**  
**(Accuracy)**

## ❖ Influence on the final ballistic




**Penetration**

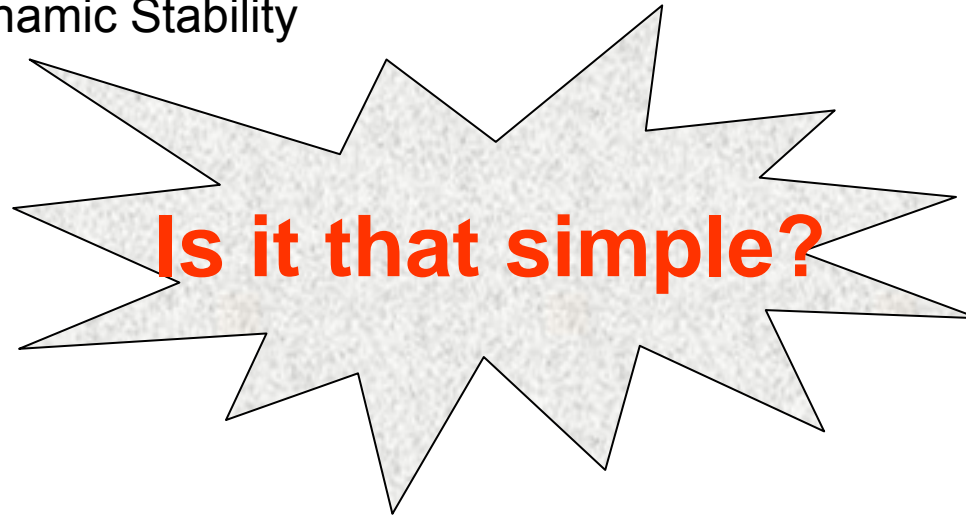

## ❖ The operational benefits:

- Warhead detonation above the ground – AP mode
- Warhead detonation upon impact and grazing (reliability and safety)
- Multi-purpose capability




**Improvements**



# ***Research and Development Activities***




# Preliminary analysis and wind tunnel tests for the “FUZAMAN”

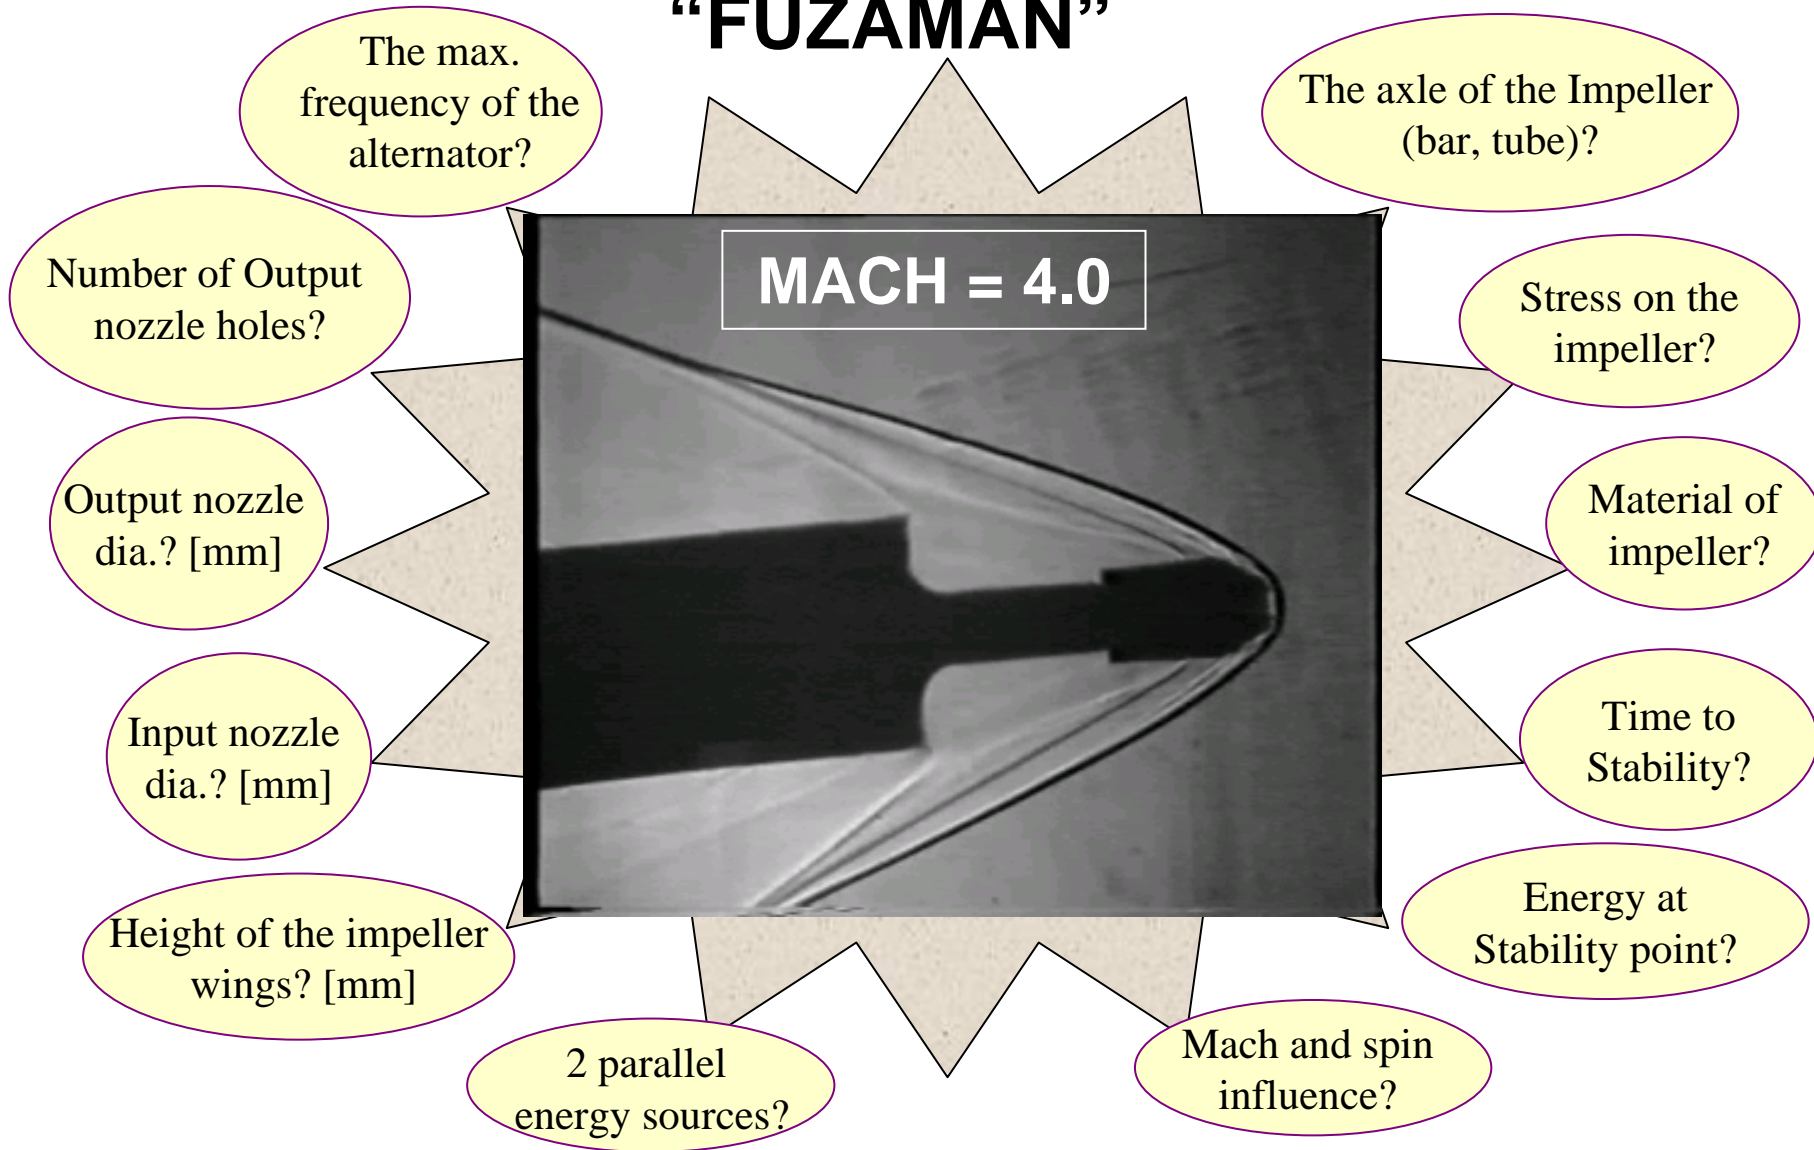



# ALTERNATOR FREQ vs. ALPHA

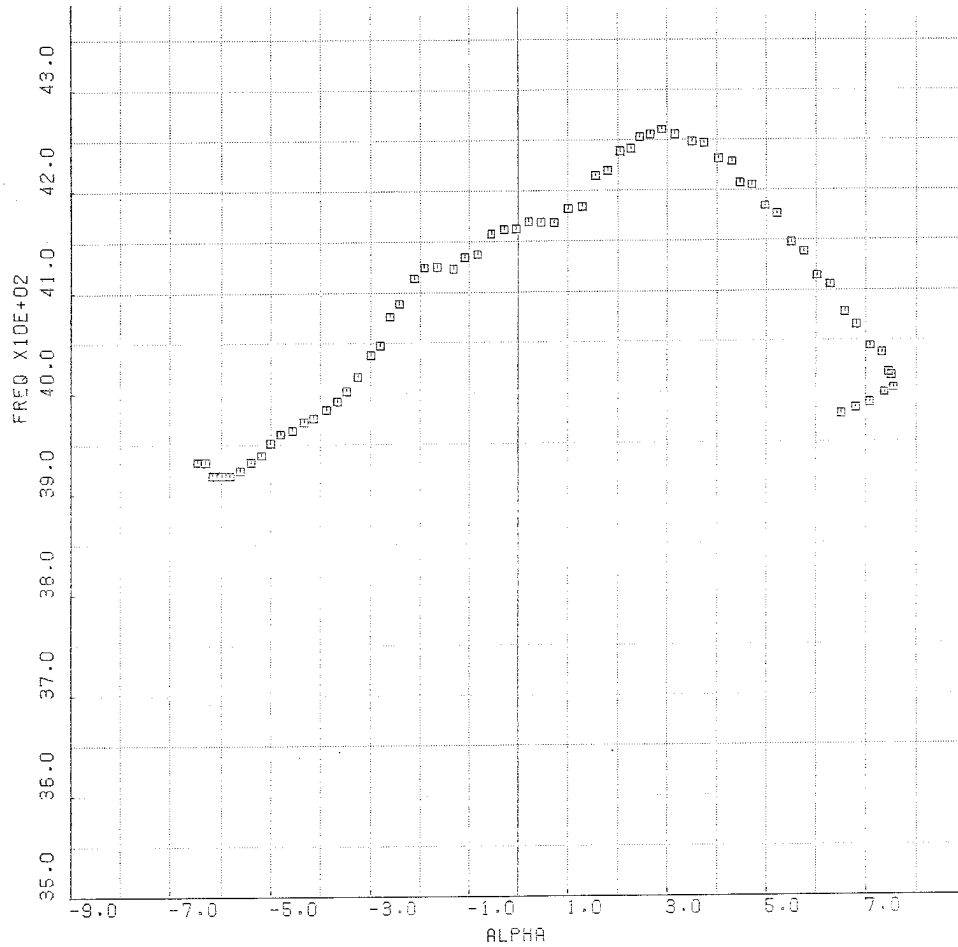


(using f to v device)


# Aeroballistics analysis and wind tunnel tests for the Projectile of IMI M152/6

## ❖ Wind tunnel tests


- Mach numbers: 1.2, 1.6, 2.0, 2.2, 2.6, 2.8
- Angle of attack:  $-7^\circ \leq \alpha \leq +7^\circ$
- Cd vs Mach
- Aerodynamic coefficients ( $C_{m\alpha}$ ,  $C_{n\alpha}$ ,  $C_{roll}$ ,  $C_{l\alpha}$  etc.)
- $X_{cp} - X_{cg}$  (static stability)

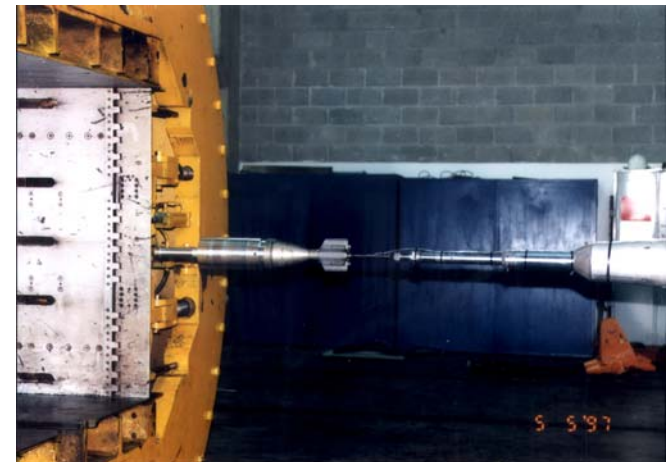


# Prototypes for Wind tunnel:

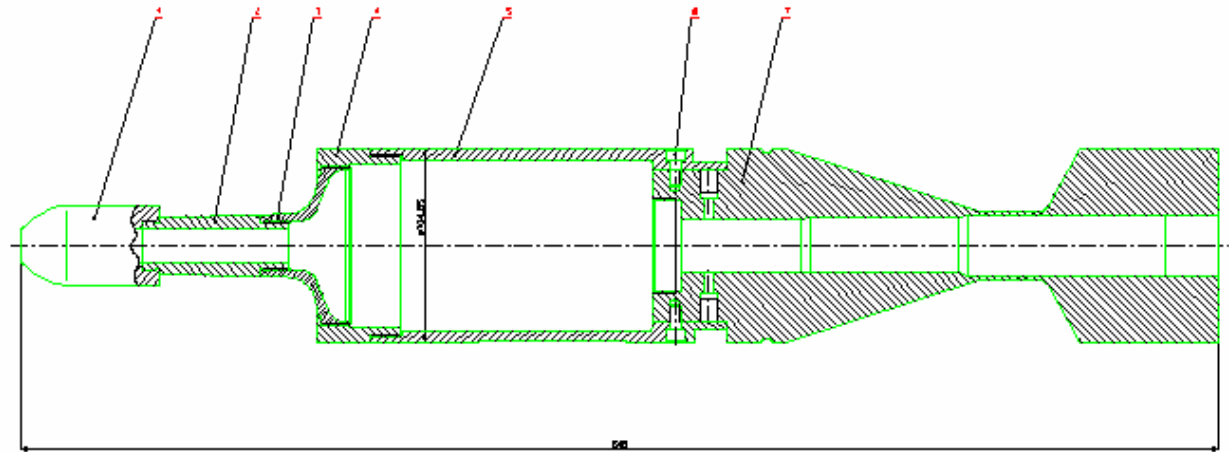


Type No. 1

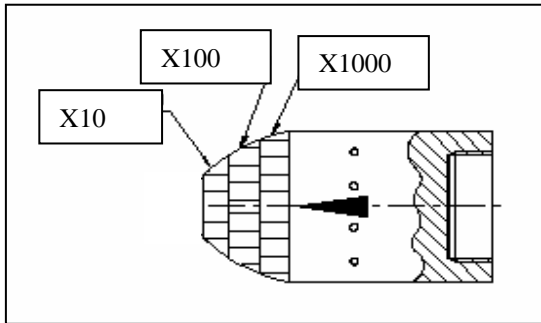

Type No. 2

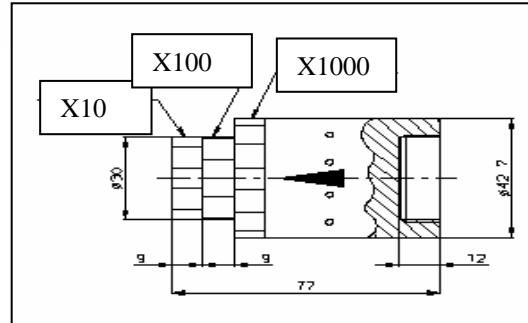

Type No. 3

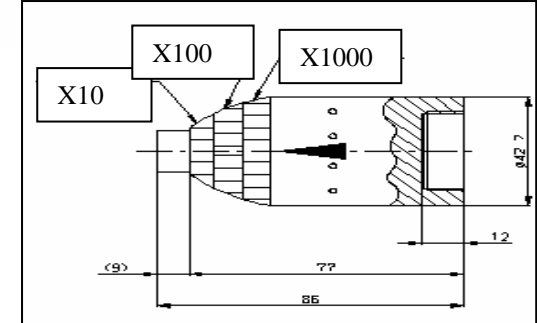




**MACH = 2.8**

**SWEEP ALPHA**







C-NOR/ALPHA

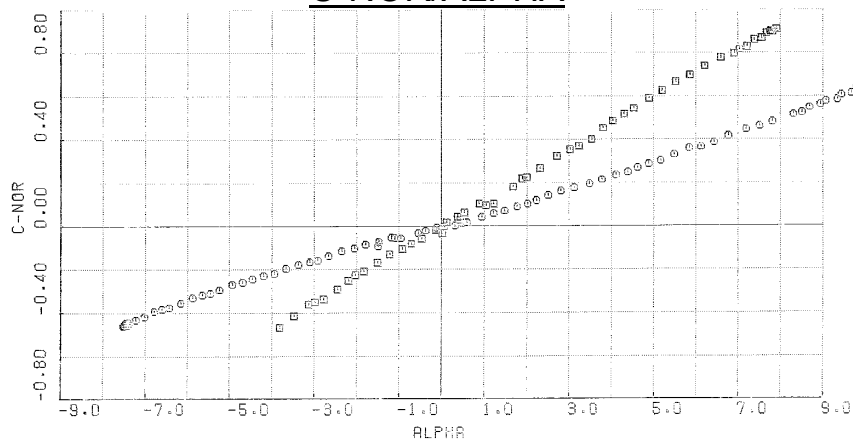


CL/ALPHA

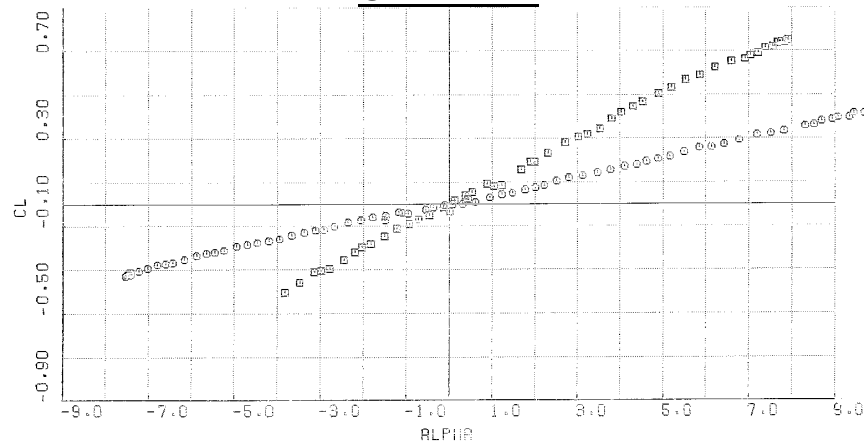

C-PITCH/ALPHA

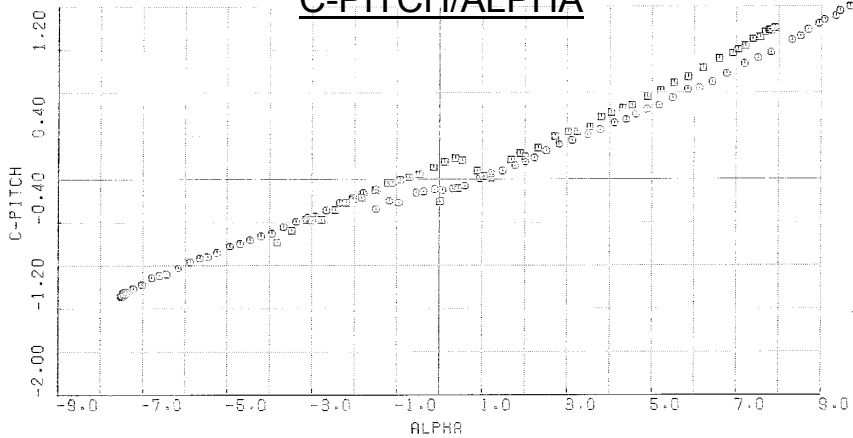


CD/ALPHA

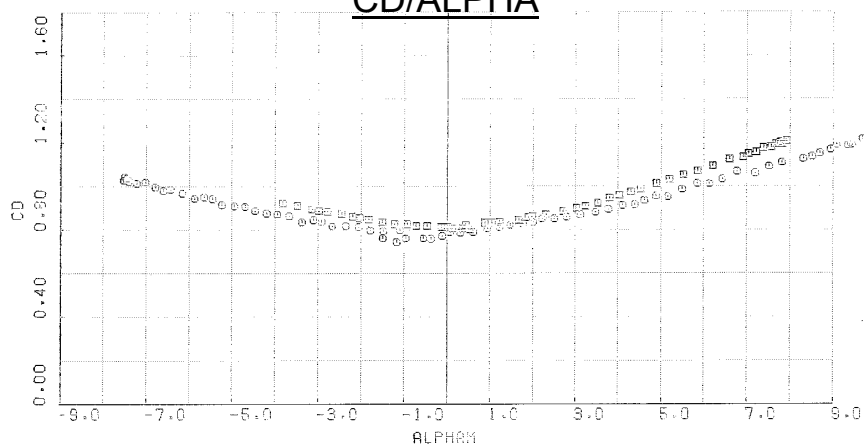







C-AXIAL/ALPHA

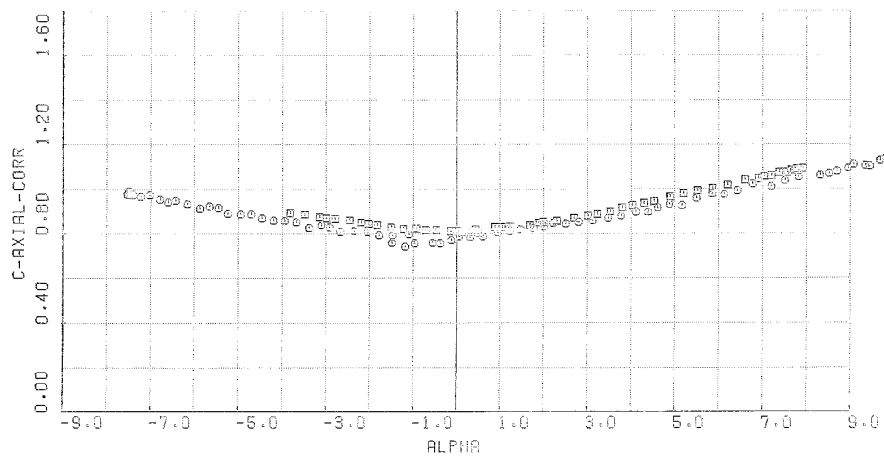


C-SIDE/ALPHA

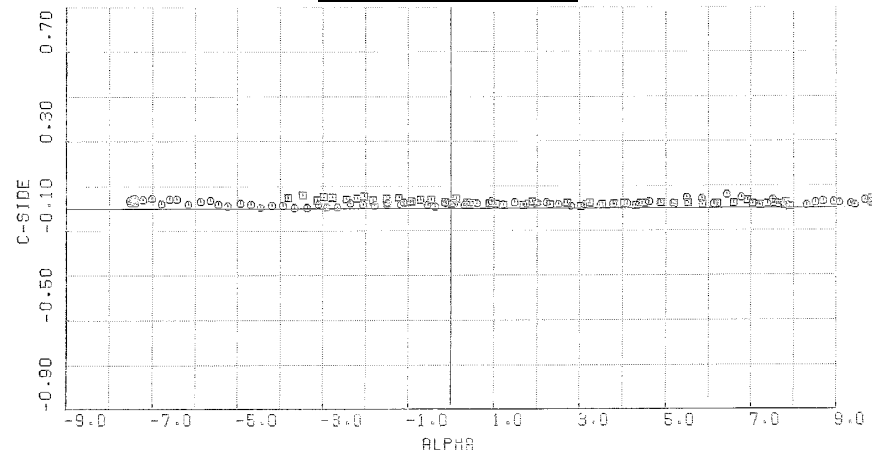

CP-BASE/ALPHA

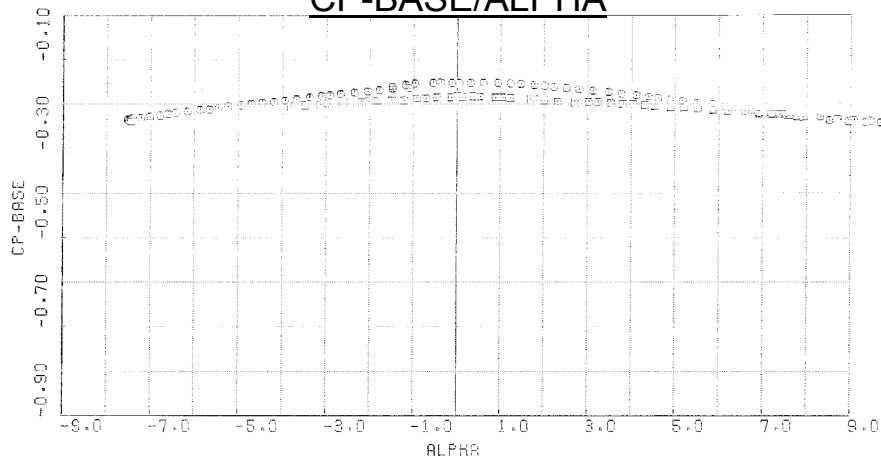


C-YAW/ALPHA

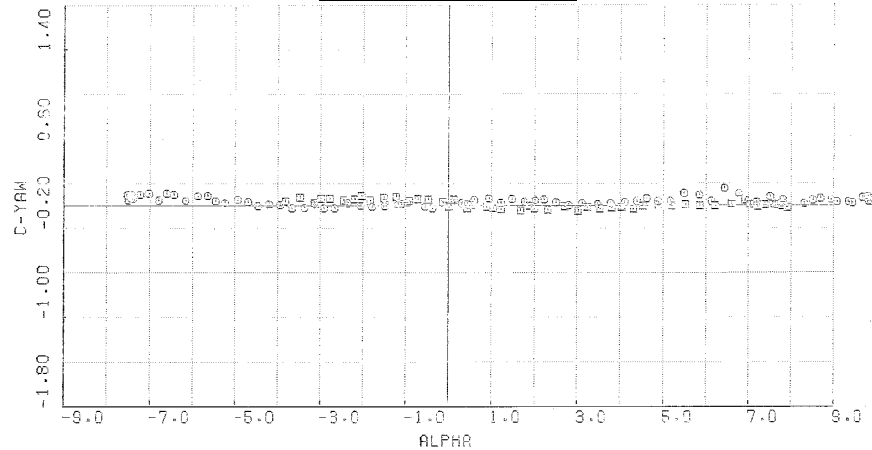






### XCP(D)/ALPHA

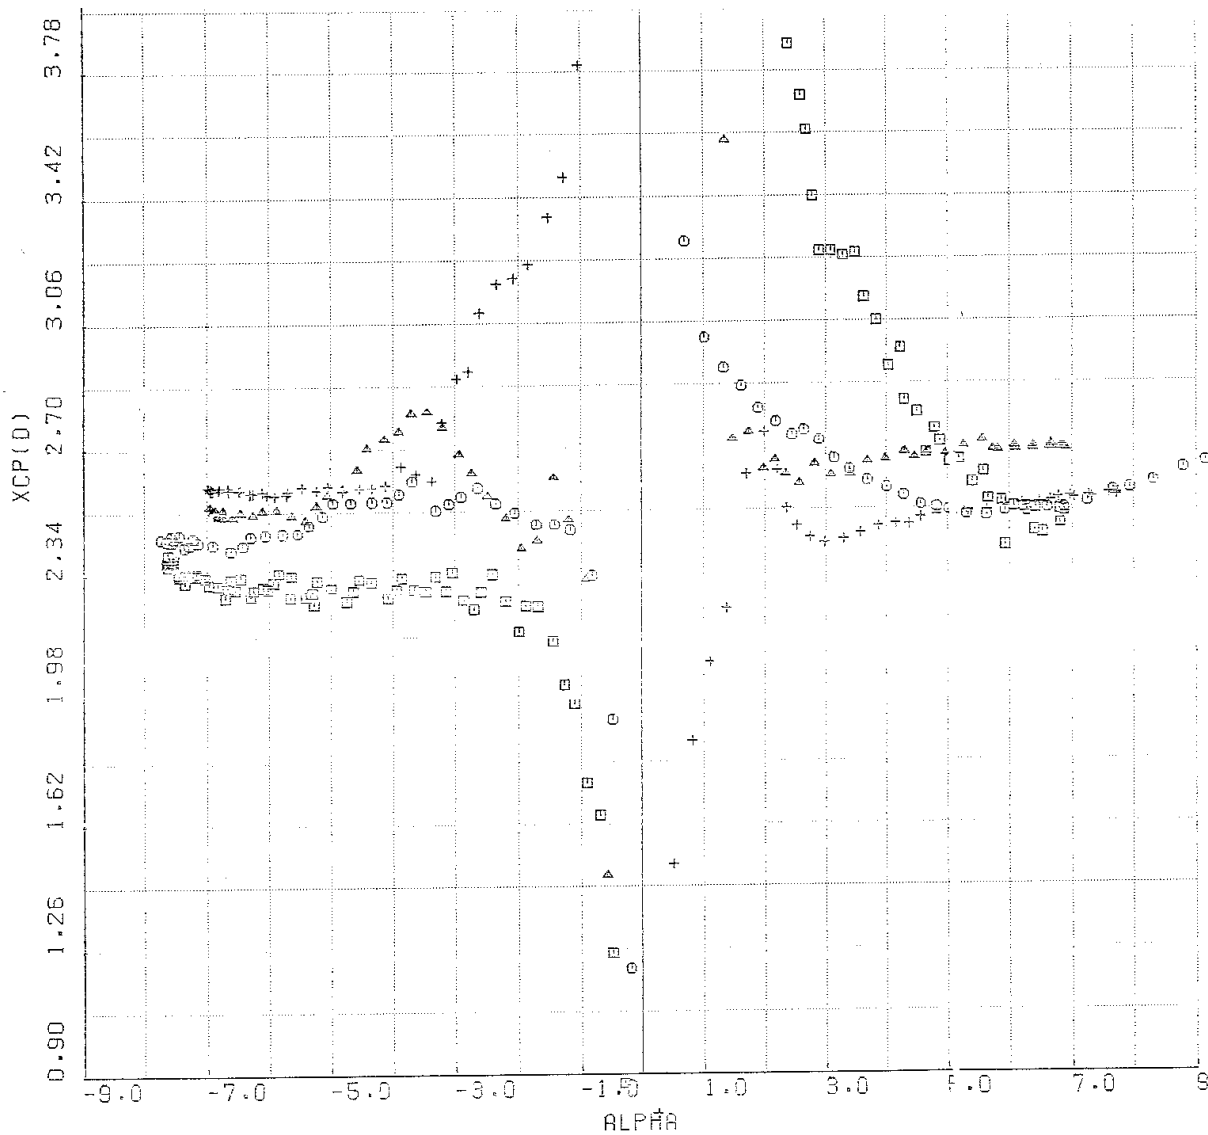






# External Ballistics test - IMI M152/6

## Prototype No. 1

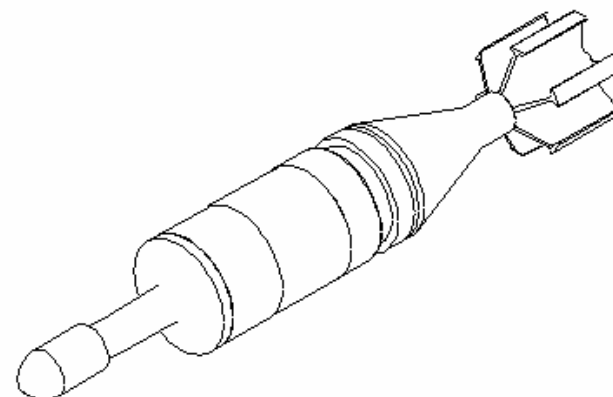
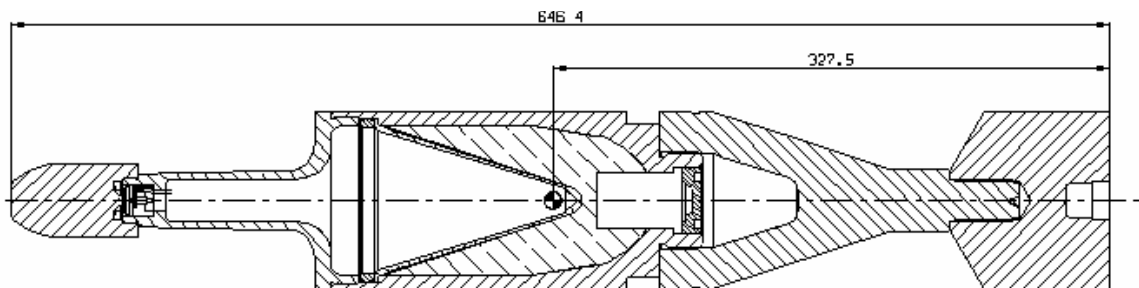
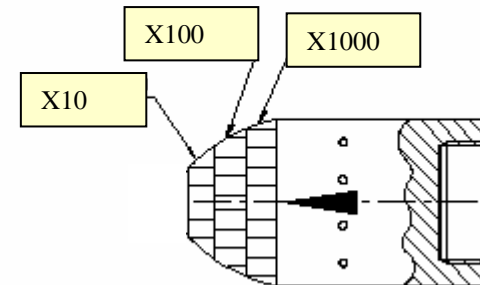


# Prototype No. 2

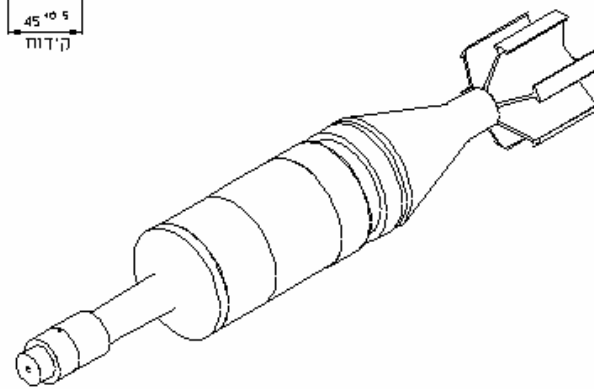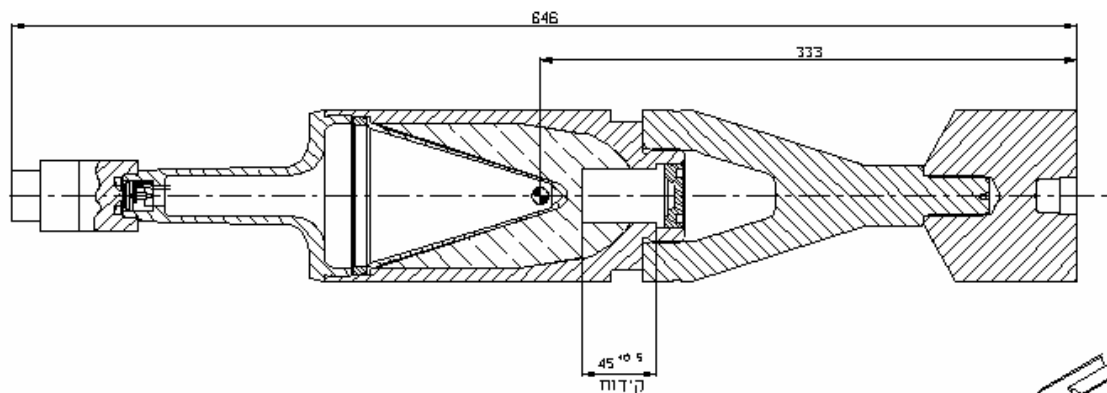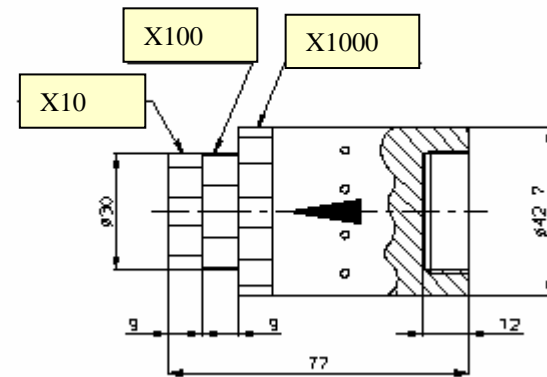





# Prototype No. 3

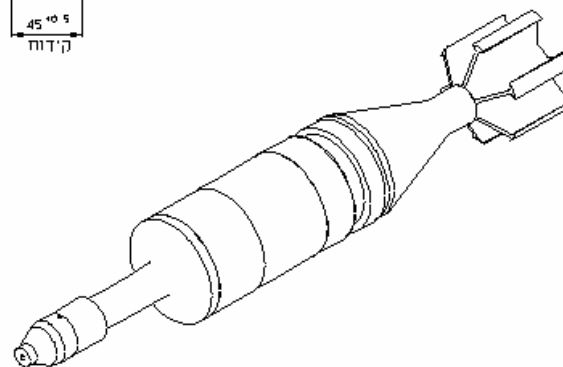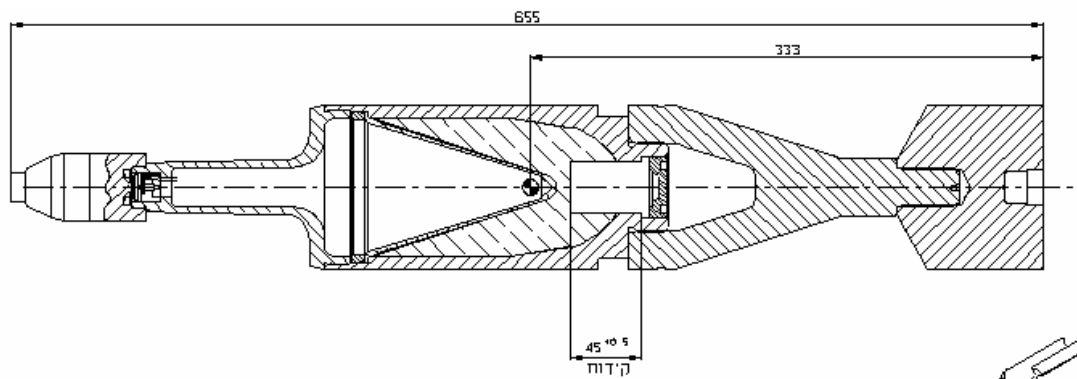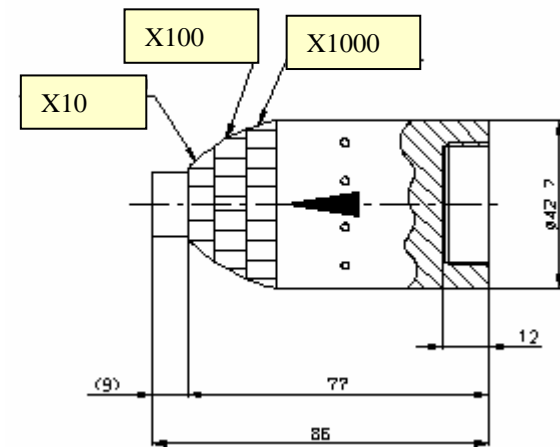




# M456 / IMI M152/3

(Reference)

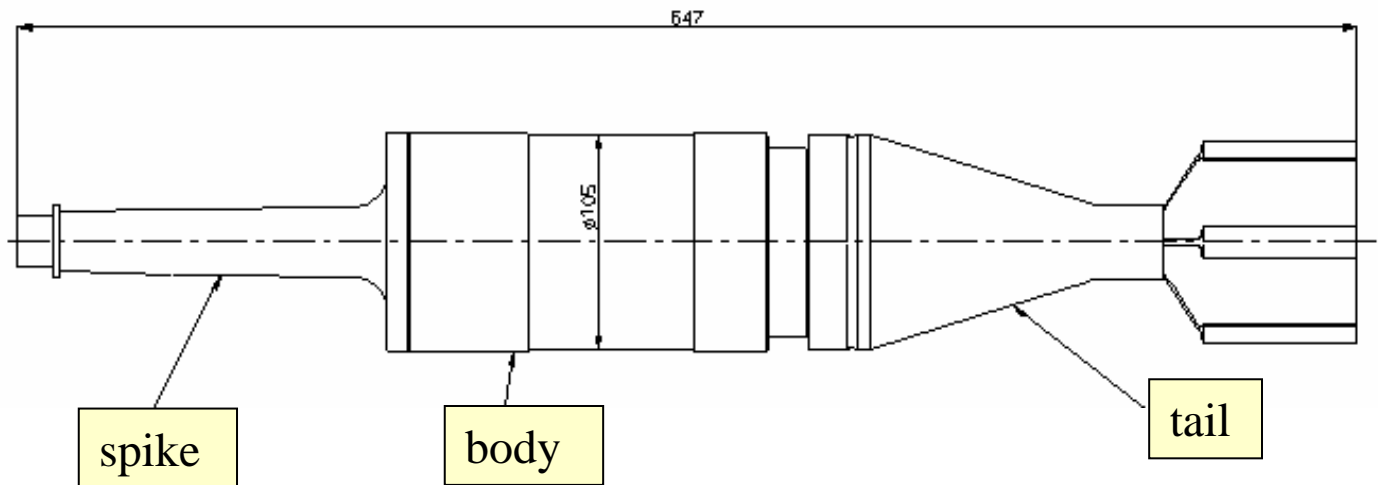







# ❖ Dispersion / accuracy (2,000 m)

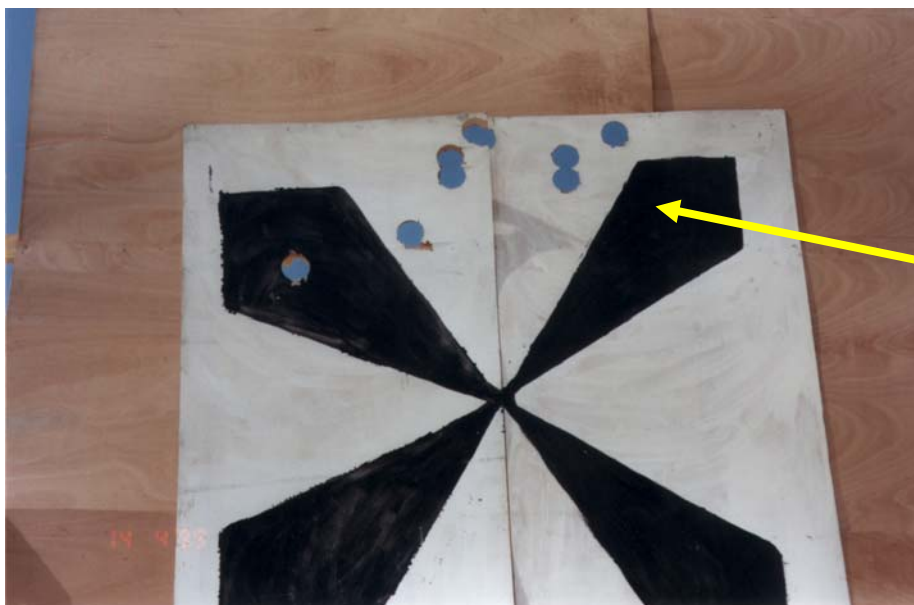




# ❖ Ballistically matched trajectory

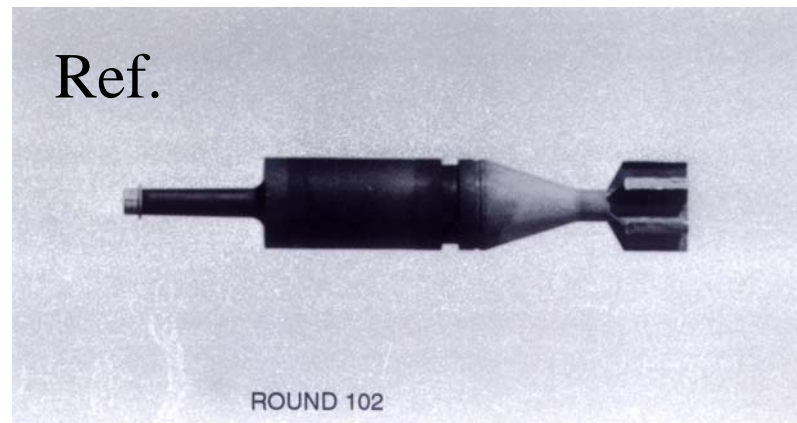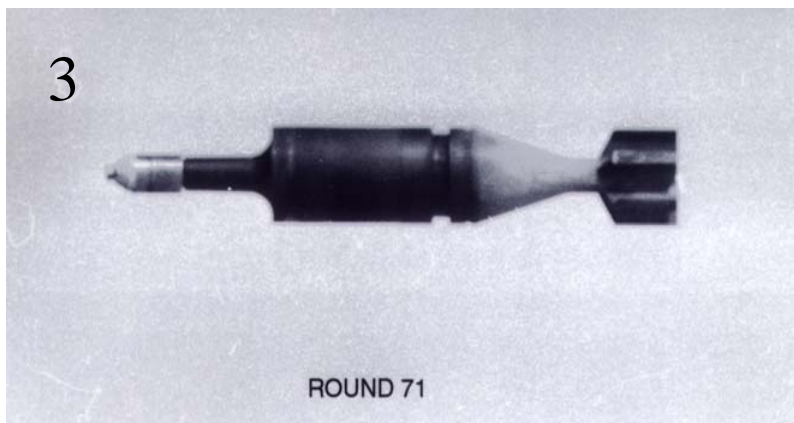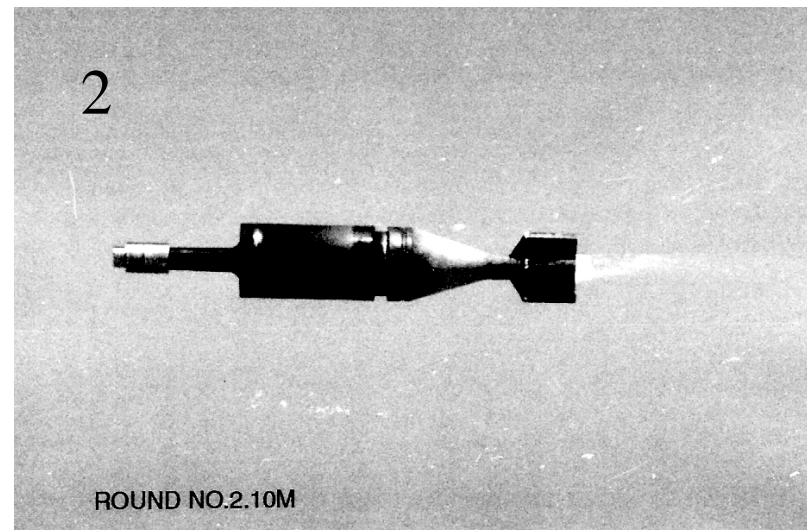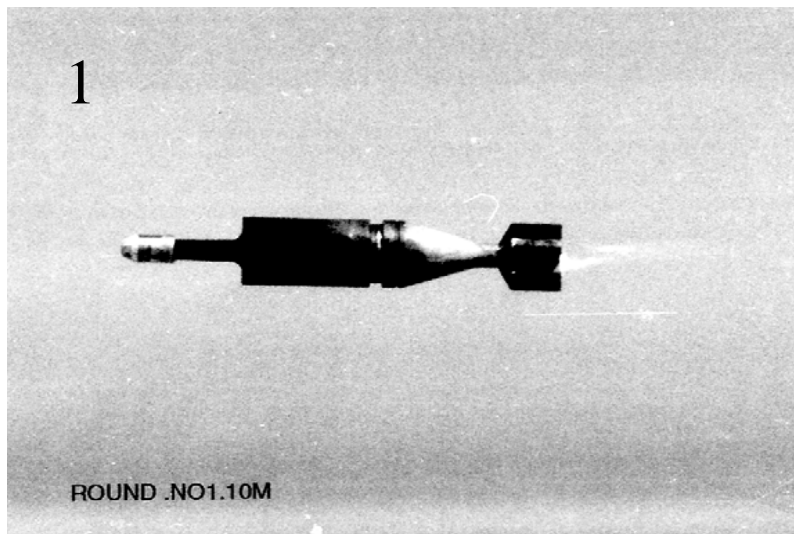





# Velocity vs. Time

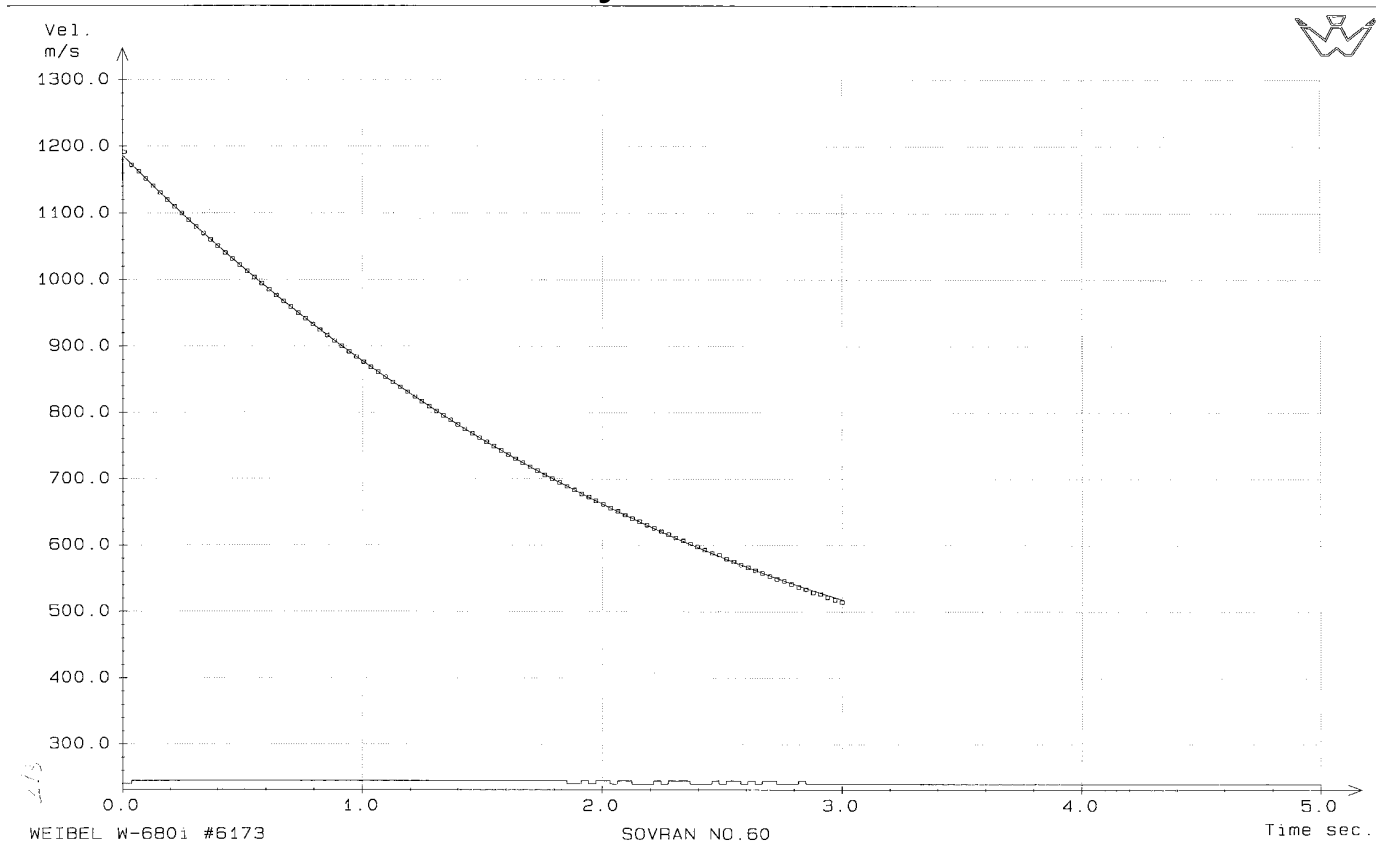

# Final Ballistics test - IMI M152/6

## ❖ Safety Firing Test

- Simulated cartridge with pyrotechnic (flash) composition




## ❖ Firing test – Yaw

- Wave length
- Dynamic stability

## ❖ Penetration tests

- M152/3 warhead
- RHA target (225 mm plate at 120-m from the muzzle)
- 60° NATO
- Alternator axle in the “FUZAMAN”:

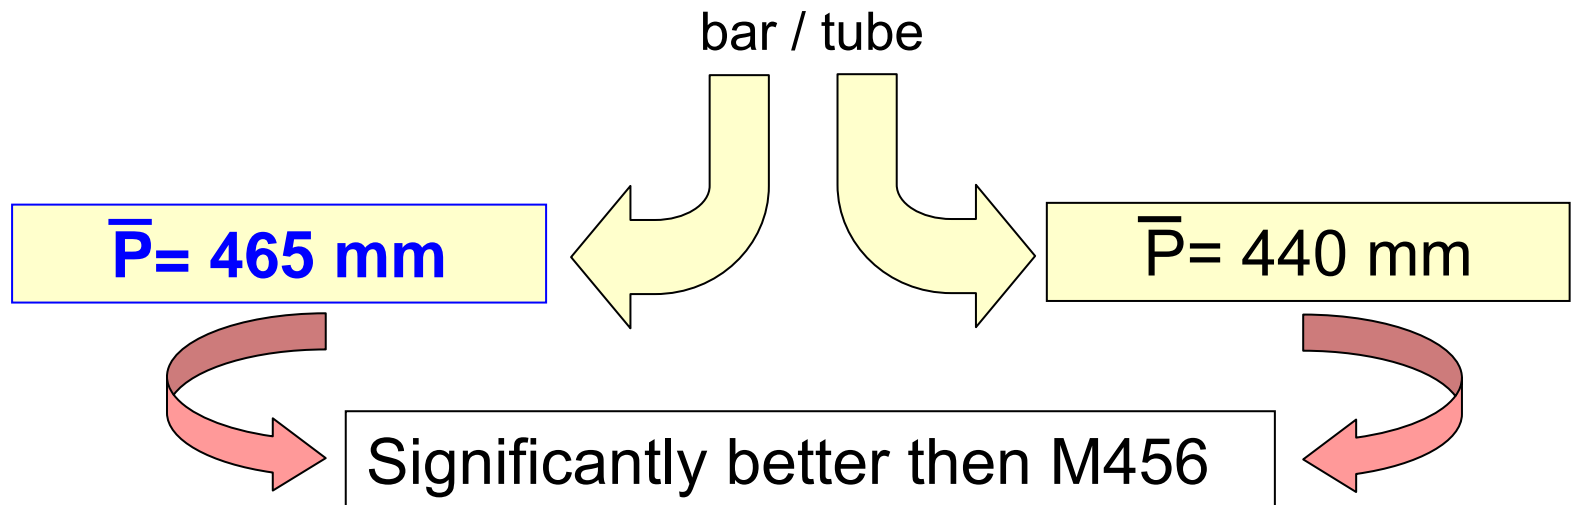



## Front Side



## Back Side



## ❖ Dynamic arena test (AP mode)





## ❖ Reliability - Detonation above the ground (AP mode)






## ❖ Operational Research -

- *Lethal Area - 20x50 m*
- *Criteria: Personnel Enemy*  
*Standing / Prone 30" assault*
- *Firing: 1 round / series of 3 rounds*
- *Remaining velocity - 855 m/sec*  
*(2,000 m)*
- *Angle of fall - 0.3 deg.*

## ❖ Results -


- ✓ The optimal height of detonation (above ground) - 6 m
- ✓ Mean Area of Effectiveness (MAE) / Lethal Area and Incapacitation Probability Maps





# Incapacitation Probability ( $\rho_k$ ) Map

shovran : velocity=855m/s,height =6m ,angle =0.3deg ,posture =six points stand

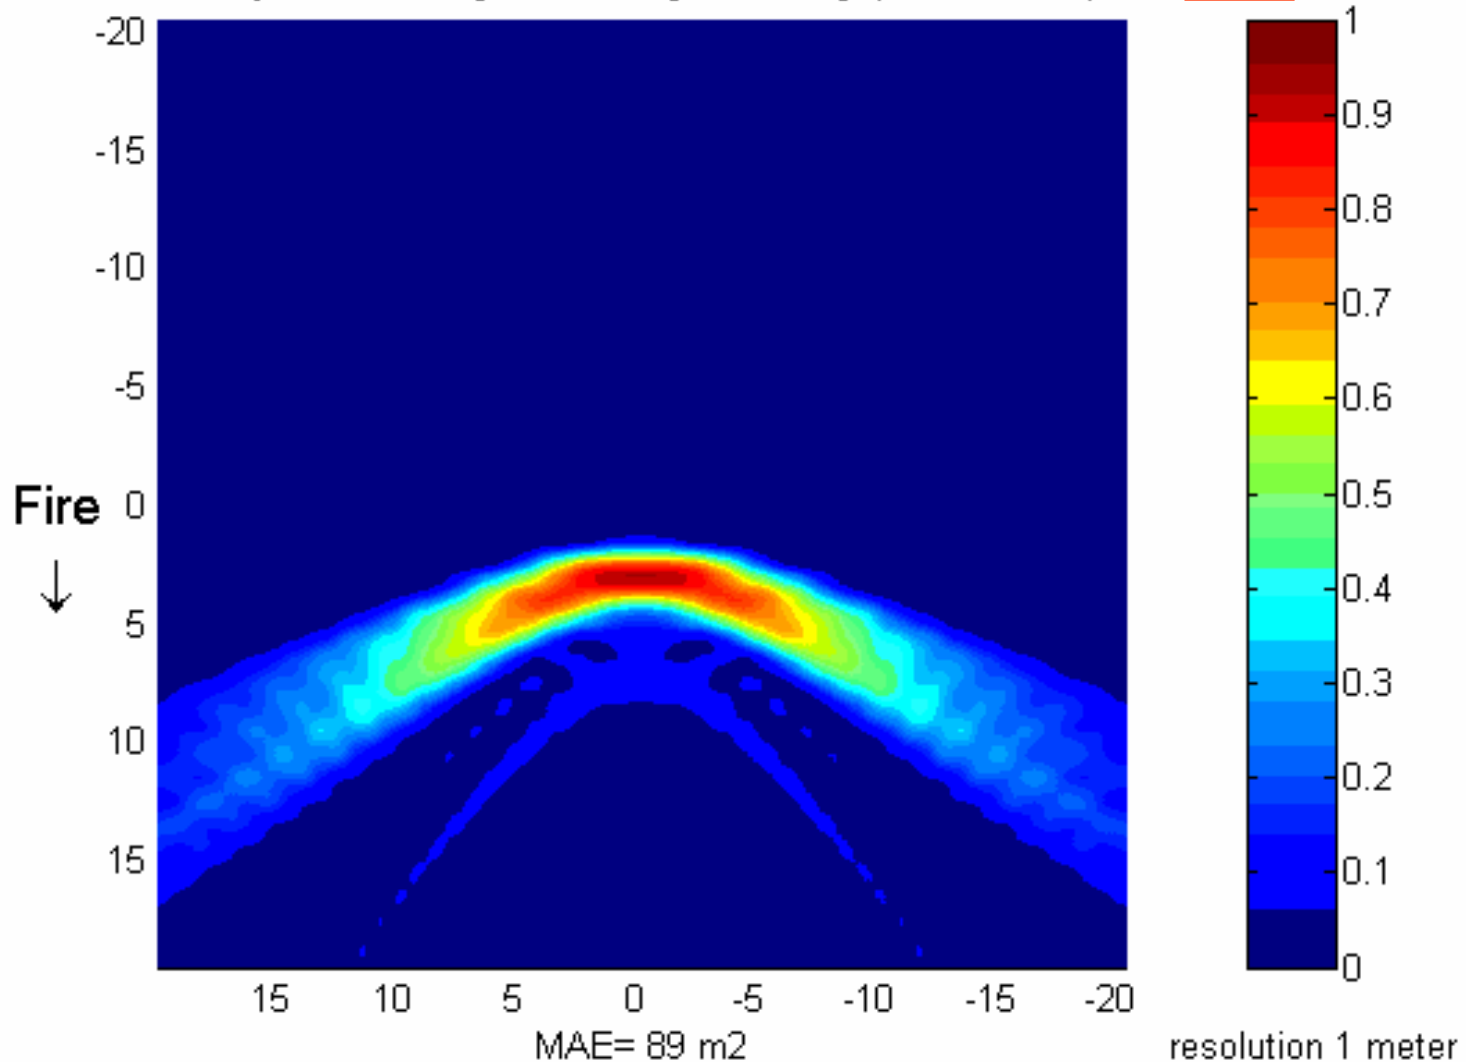






# Incapacitation Probability ( $\rho_k$ ) Map


shovran : velocity=855m/s,height =6m ,angle =0.3deg ,posture =six points stand

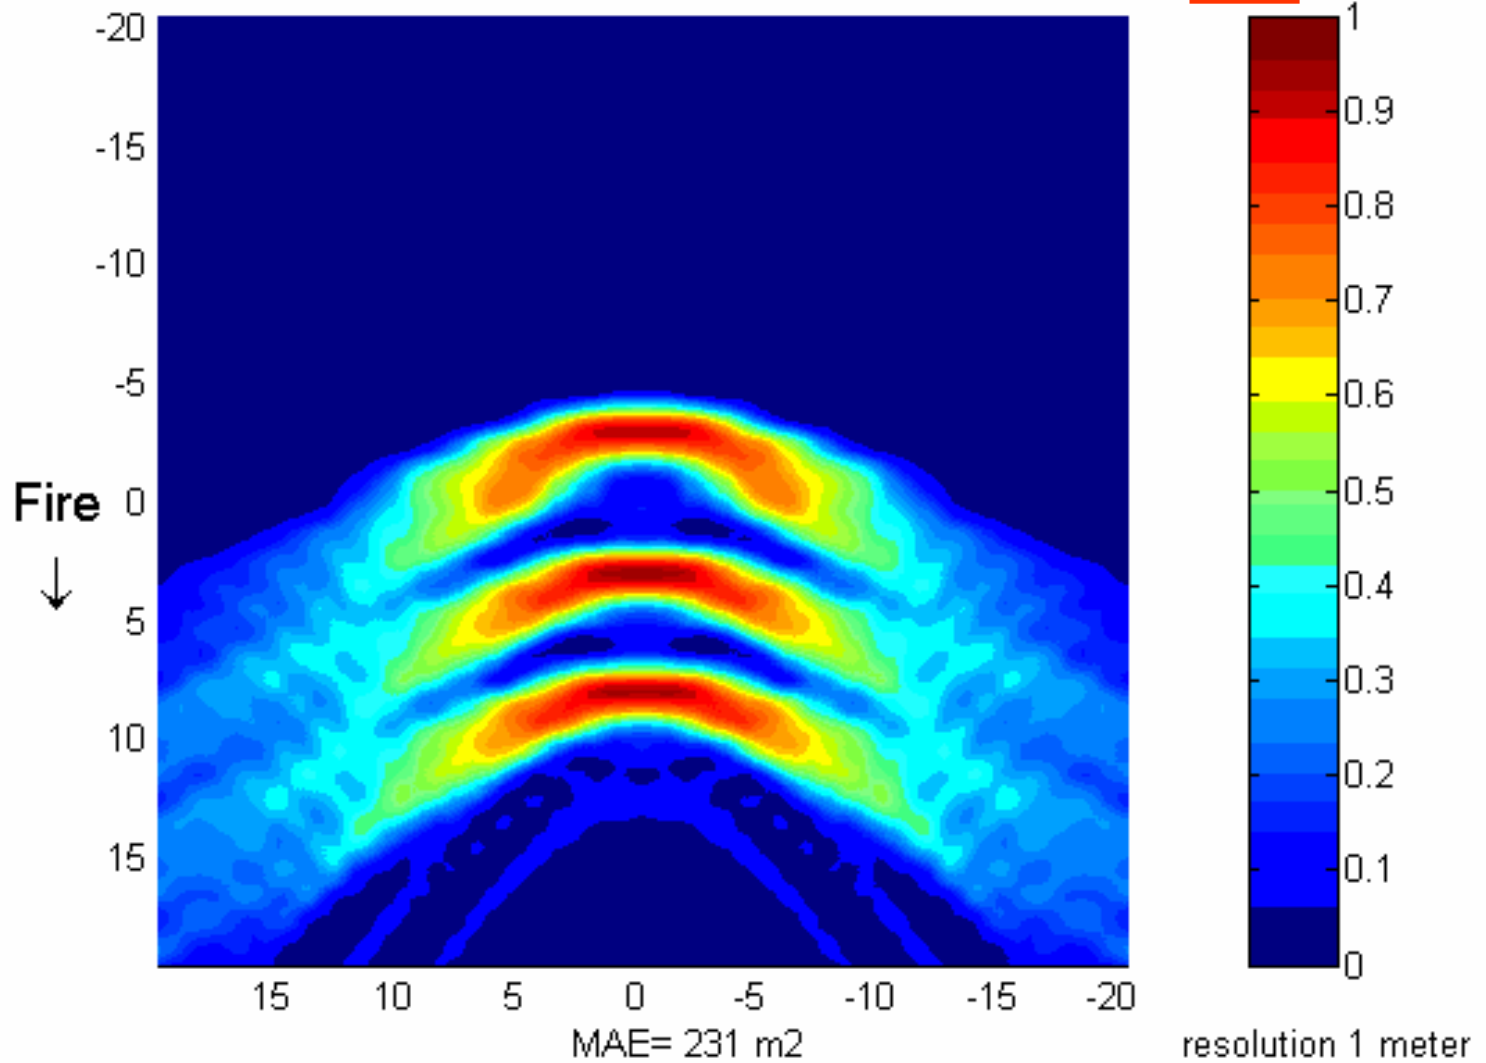



# Incapacitation Probability ( $\rho_k$ ) Map


showran : velocity=855m/s,height =6m ,angle =0.3deg ,posture =prone

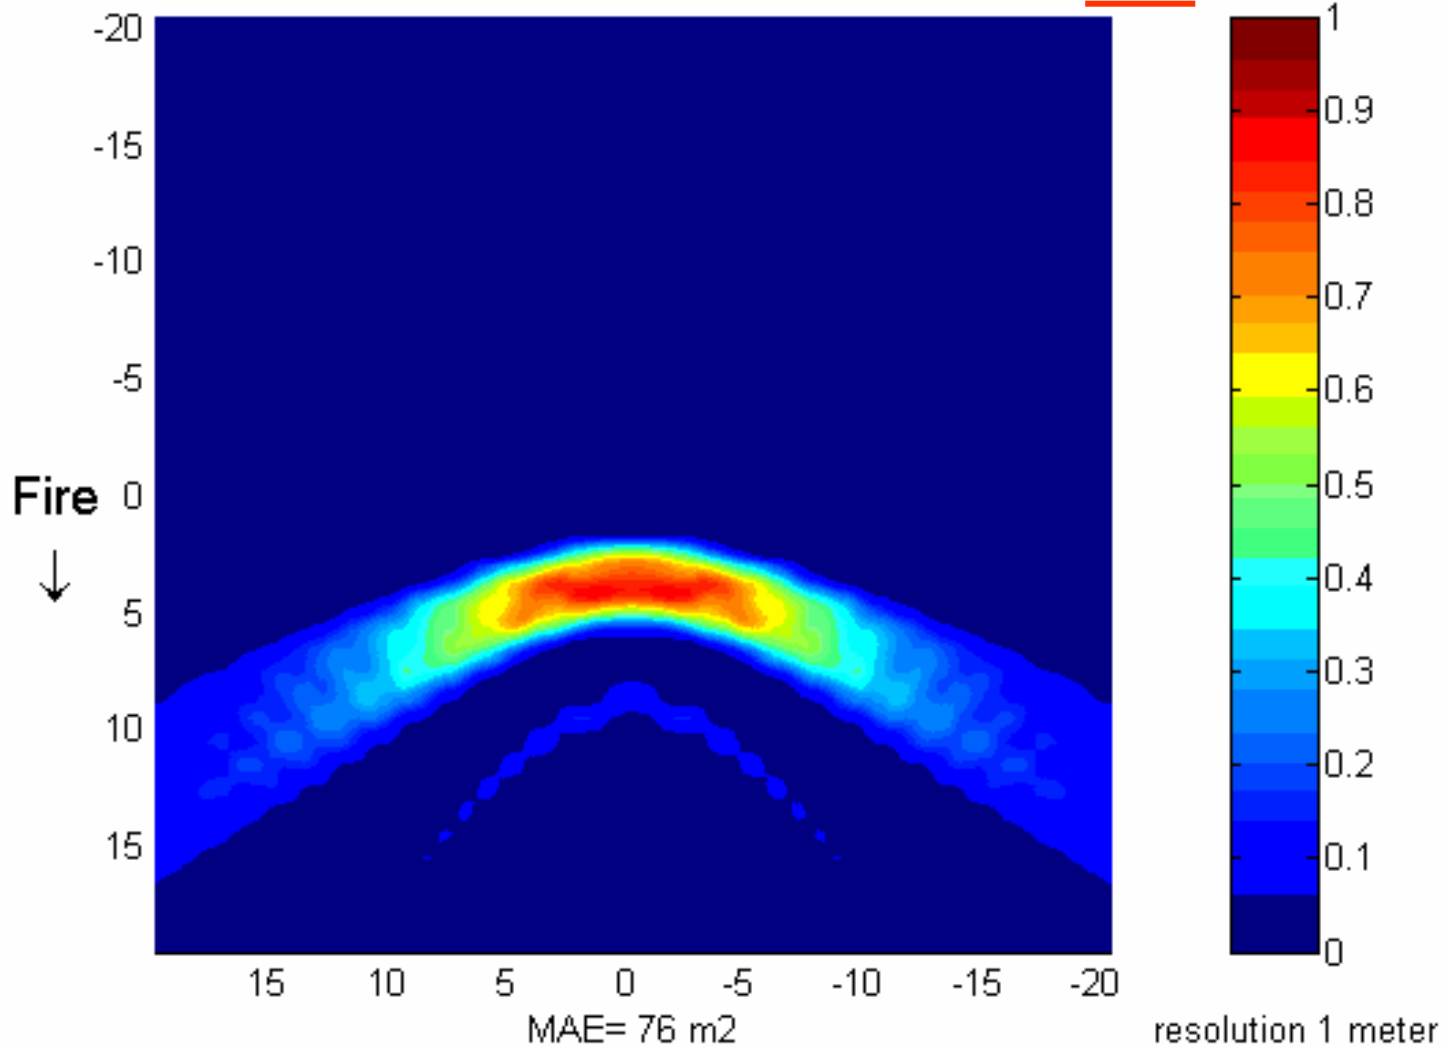



# Incapacitation Probability ( $\rho_k$ ) Map

shovran : velocity=855m/s,height =6m ,angle =0.3deg ,posture =prone

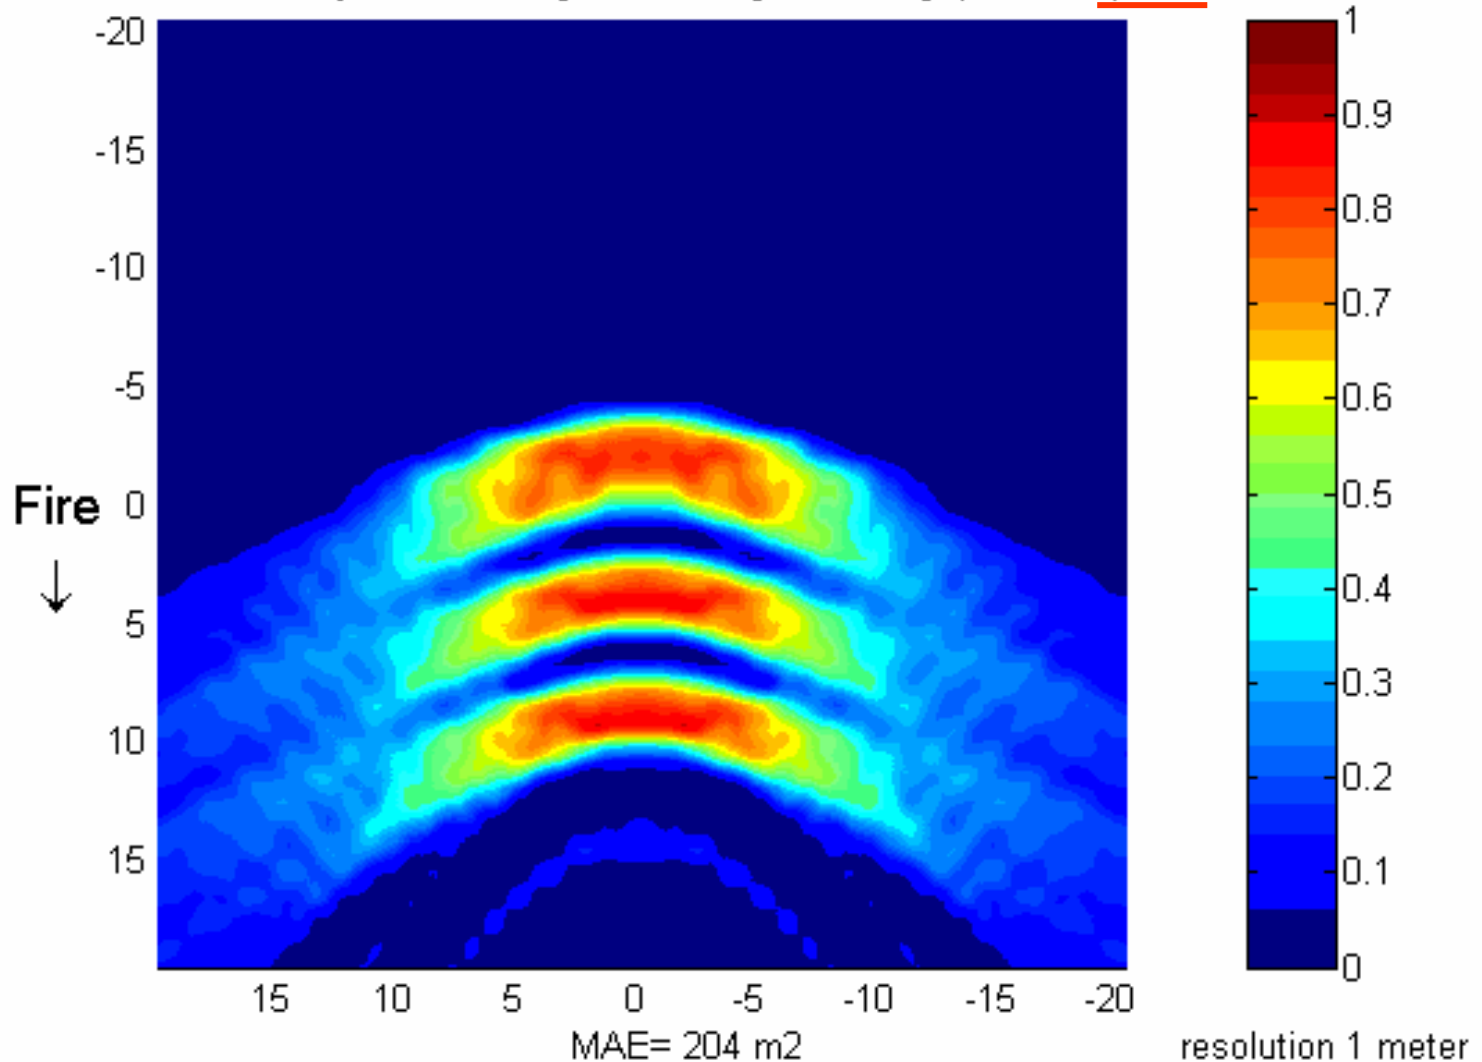




## ❖ Grazing (impact switch) Functioning test






# Conversion of M456 or IMI M152/3 to IMI M152/6 at field level

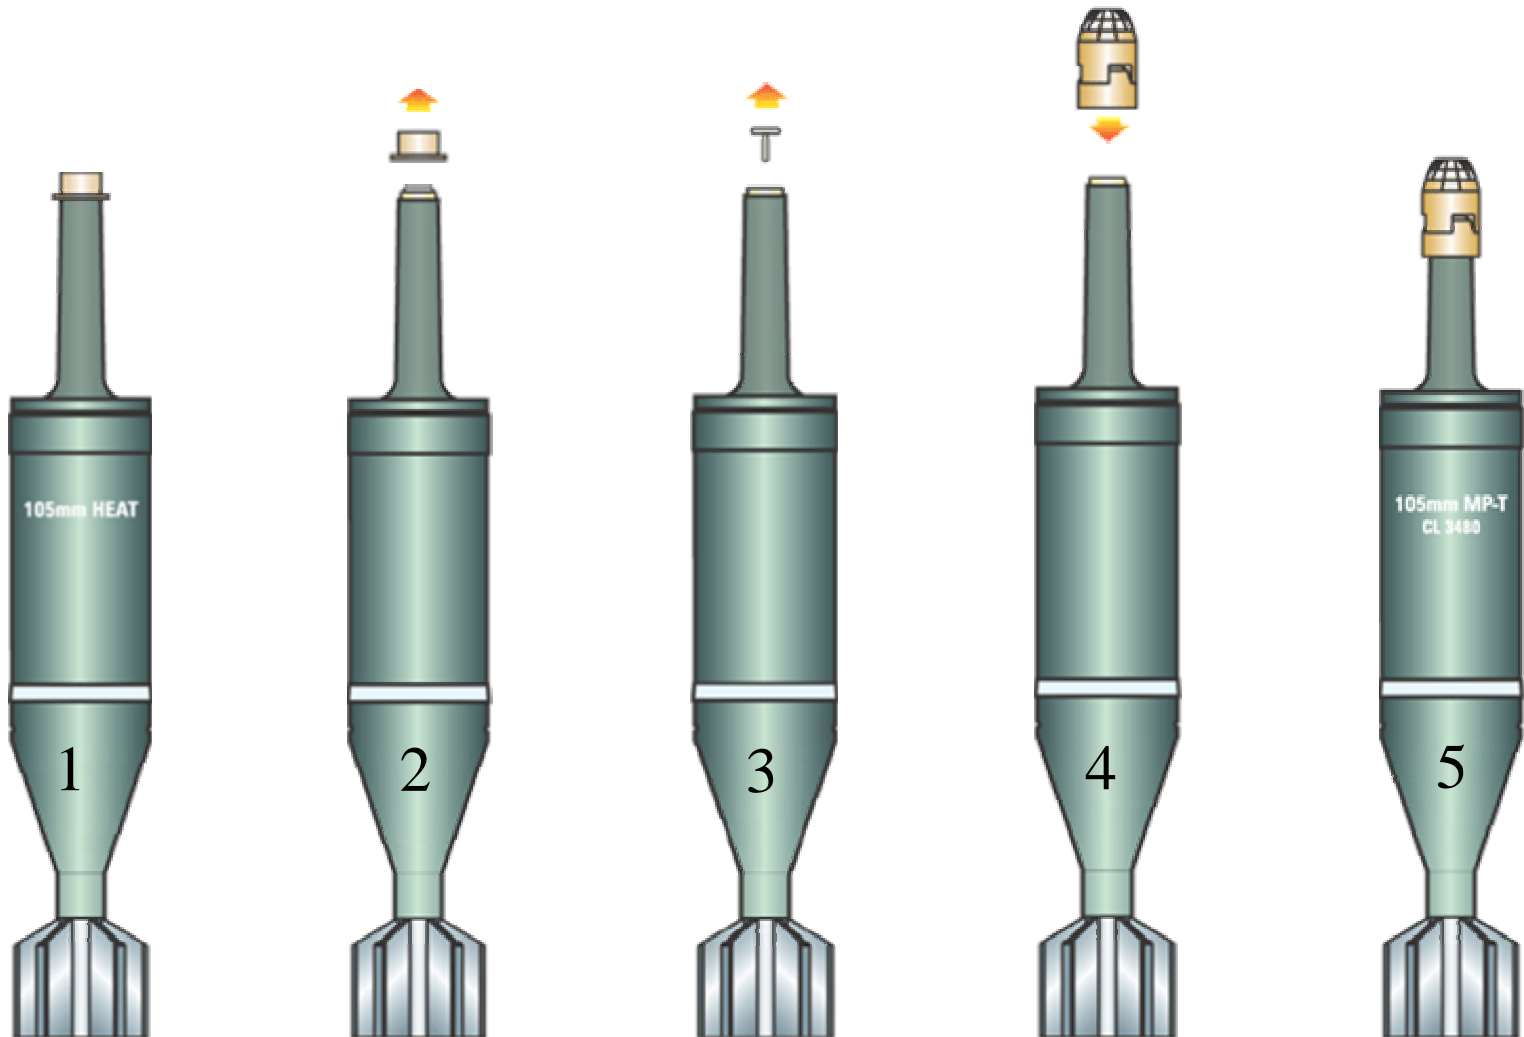

# Growth Potential – 120 mm

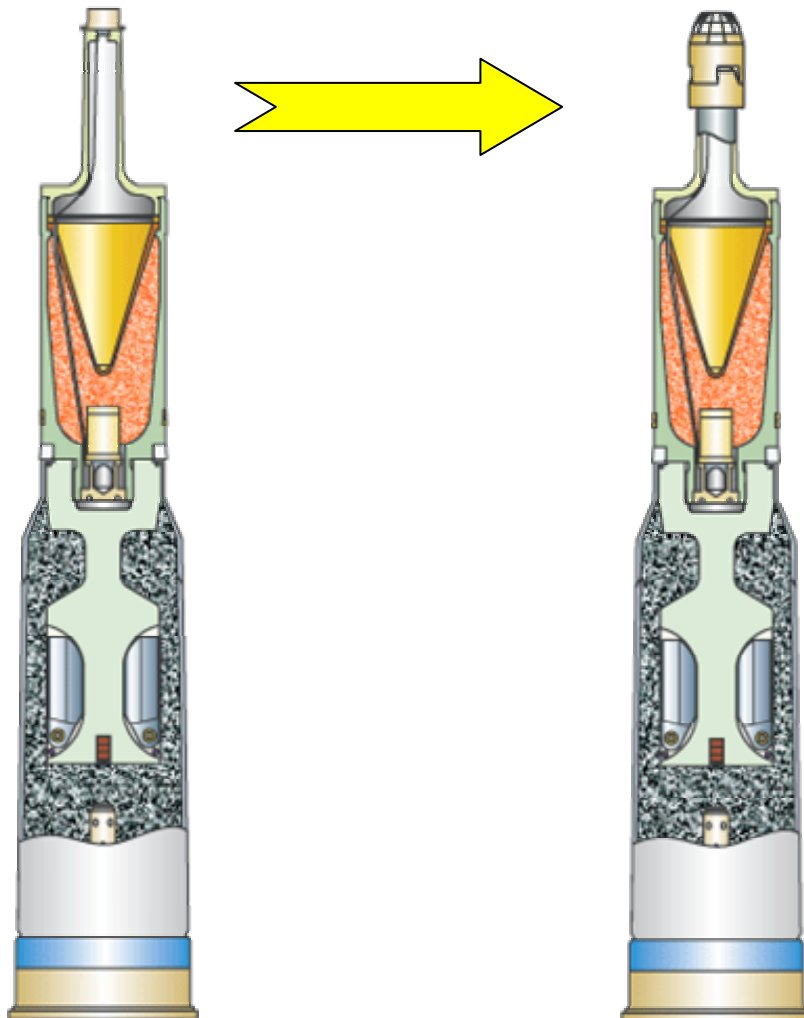

## CHARACTERISTICS

### Cartridge

Weight ..... 25 kg  
 Length ..... 984 mm

### Projectile

Weight ..... 15 kg  
 Length ..... 726 mm  
 Body material ..... steel  
 Explosive ..... Comp. B, 1.8 kg

### Other Components

Cartridge case ..... combustible  
 Propellant ..... M30, 5.6 kg  
 Primer ..... electric, M4513  
 Fuze ..... dual mode, electronic time/point initiated base detonation (ET-PIBD)

## BALLISTIC PERFORMANCE



Muzzle velocity ..... 1078 m/s  
 Accuracy, typical SD ..... 0.25 mil, H and B  
 Effective range ..... more than 3000 meters  
 Set for time ..... projectile detonates 5 m (=distance) functioning above ground

## BALLISTIC PERFORMANCE

Temp. limits, firing ..... -40 to +52°C  
 Temp. limits, storage ..... -40 to +63°C  
 Various tests IAW MIL-STD-810D and NATO standards



# Summary - Targets and Operating Modes

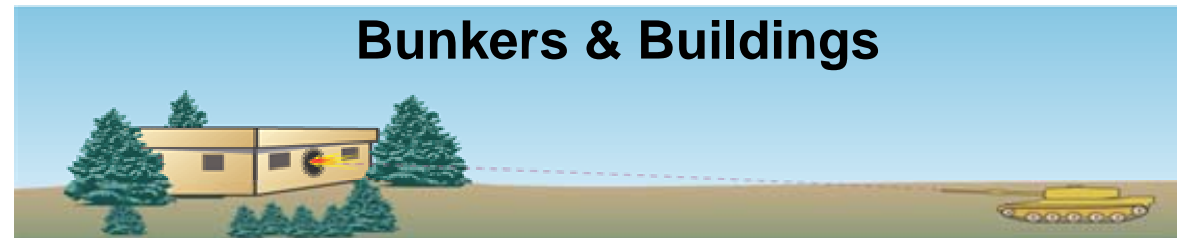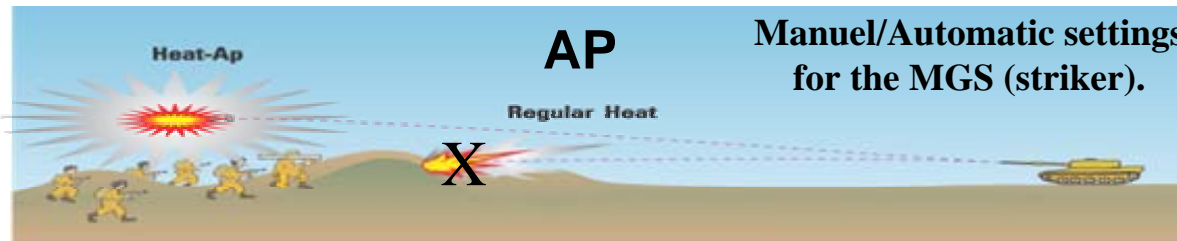

## Grazing (safety)

If the projectile grazes the ground, an impact switch functions and detonates the warhead (no duds).